

07-05-00

A

The Law Offices of

STRAUB & POKOTYLOMichael P. Straub
mike@sp-ip.com1 Bethany Road
Suite 56, Bldg. 4
Hazlet, NJ 07730John C. Pokotylo
john@sp-ip.comTelephone: 732-335-1222
Facsimile: 732-335-1228
Internet Site: www.sp-ip.com

June 30, 2000

UTILITY PATENT APPLICATION TRANSMITTAL LETTERAssistant Commissioner of Patents
Box **Patent Application**
Washington, D.C. 20231

Sir:

Enclosed herewith for filing is the following
utility patent application:Attorney Docket No.: **MS-65/1(116619.2)**Applicants: **Yacov YACOBI et al.**Title: **"METHODS AND APPARATUS FOR PROTECTING
INFORMATION CONTENT"****PATENT APPLICATION FILING FEE CALCULATION**

	<u>No. Filed</u>	<u>Less</u>	<u>Rate/Claim</u>	<u>Fee</u>
Total				
Claims	<u>55</u>	-20	35 x \$18.00	\$ <u>630.00</u>
Independent				
Claims	<u>7</u>	-3	4 x \$78.00	\$ <u>312.00</u>
			Minimum Filing Fee	\$ <u>690.00</u>
			Multiple Dependency Fee	
			(if applicable - \$260.00)	\$ <u>00.00</u>
			50% Reduction for Small Entity	
			(Independent Inventor, Non-profit	
			Corporation, or Small Business	
			Concern) - appropriate	
			verified statement attached	\$- <u>00.00</u>
			TOTAL FILING FEE	\$1,632.00
			ASSIGNMENT RECORDATION	\$ <u>40.00</u>
			TOTAL FEES DUE	\$1,672.00

☐ Submission of Priority Document and a certified copy of a _____ patent application or inventor's certificate, filed _____ and assigned serial no. _____, upon which a claim to priority is made; and

☐ Other: _____

Respectfully submitted,

STRAUB & POKOTYLO

Michael P. Straub
Michael P. Straub, Attorney
Reg. No. 36,941
Customer No. IDON601137

EXPRESS MAIL CERTIFICATION

"Express Mail" mailing label number: EL547453413US
Date of deposit: June 30, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service on the date indicated above and is addressed to the Assistant Commissioner of Patents, **Box Patent Application**, Washington, D.C. 20231.

Michael P. Straub
Signature of person making certification

Michael P. Straub
Name of person making certification

-1-

**METHODS AND APPARATUS FOR
PROTECTING INFORMATION CONTENT**

5

RELATED APPLICATIONS

This application claims the benefit of U. S
Provisional Application No. 60/160,603, filed October 20,
1999.

10

FIELD OF THE INVENTION

15

The present invention relates to methods and
apparatus for transmitting and storing information and,
more particularly, to methods and apparatus for
discouraging, and/or protecting against, the unauthorized
copying or use of the content of transmitted and/or
stored information, e.g., video and/or audio signals.

20

BACKGROUND OF THE INVENTION

25

Currently, video continues to grow in
importance. Video is now used for entertainment,
business and educational purposes.

30

Consumer electronics (CE) devices such as
digital video disks (DVDs), video cassette recorders,
televisions, etc. are frequently used to record and/or
playback video information. While many current CE video

devices are analog devices such as VHS VCRs, as the cost of digital media and digital players, such as DVD players, decreases, digital CE devices are likely to replace many of the analog devices presently in use.

5

Theft of copyrighted information, e.g., commercial videos, is a major problem. In order to discourage the copying of, e.g., analog video cassettes, many video distributors intentionally insert noise, as a "copy protection" scheme, into a synchronization portion of the recorded signal. While this noise normally does not significantly effect the viewing of the original cassette, copying of such cassettes using conventional VCRs tends to produce a copy that contains an annoying amount of flicker. The flicker results from inaccuracies associated with the copying process through which the noise included in the synchronization signal is much more noticeable in the copy than in the recording being copied.

10

15

20

Such known copy protection schemes tend to work reasonably well with current analog VCRs and television sets because such sets are designed to work with a synchronization signal that is relatively noise-free.

25

While CE devices are tending towards all digital embodiments, analog interfaces with computer monitors are likely to be favored over digital interfaces for quite some time. Generally, for a digital signal to accurately represent an analog video signal, the sampling rate of the digital signal must be at least twice the

30

highest frequency component of the analog signal being represented. Accordingly, to accurately represent high frequency analog video signals, extremely high sampling rates and digital signal processing rates must be supported.

Because of the high signal processing rates that must be supported by digital monitors to display comparable video signals applied to an analog monitor, analog signal processing circuitry included in display devices has tended to be less expensive to implement than digital circuitry. For this reason, among others, analog video signals have generally been preferred to digital video signals for monitor/computer connections. Analog video signals, e.g., VGA signals, usually include, red (R), green (G), blue (B) color signals, horizontal synchronization (HS) signal, and vertical synchronization (VS) signals. Analog interconnects for such signals, e.g., monitor cables, generally include at least one line for each of the R, G, B, HS, and VS signals and at least one line for monitor plug-and-play (PP) signals. Two PP lines are common. A nine pin DB-9 connector has become a common connector for connecting analog monitors, e.g., VGA monitors, to computer graphics cards and adapters.

Today, many computer monitors are analog "multi-sync" monitors. Such monitors are designed to automatically synchronize to a plurality of signals of different frequencies. Because such computer monitors are designed to handle synchronization signals of multiple frequencies, they are far more flexible than

conventional television sets at handling noise and/or slight frequency affects in synchronization signals. For this reason, conventional analog video copy protection techniques, such as that described above, are generally ineffective when applied to video signals supplied to analog multi-sync computer monitors.

In addition to DVDs, digital high definition televisions are likely to become common in the next few years as digital television broadcasts begin and the price of digital television sets decreases.

In order to reduce the risk of unauthorized copying of copyrighted works, several companies, including Hitachi, Ltd., Sony, Intel, and others have proposed an industry standard for digital consumer electronics devices which involves the use of authentication and key exchange procedures along with data encryption and the use of a digital communication bus which complies with IEEE standard 1394. The bus is sometimes referred to as "1394 Firewire". The proposed standard, hereinafter referred to as the "5C Standard", is discussed in the 5C Digital Transmission Content Protection White Paper White Paper, Revision 1.0, dated July 14, 1998.

The 5C standard includes several features. Four such features are:

(1) Copy control requests - A source device can request a destination device to honor copy control requests including copy-never, copy-free, and copy-once requests.

(2) Use of certificates - A destination device proves its trustworthiness to a source device by presenting a digital certificate, e.g., an authentication key, and using a corresponding private key for communications with the source device. The certificate is issued by a certifying authority that has examined the destination device to determine that it will honor the 5C Standard copy control requests.

(3) A key exchange protocol - The protocol is used by the source and destination devices once the destination device has proved that it is certified to establish a session key (content encryption key) used for encrypting copyrighted information to be exchanged.

(4) Transmission of copyrighted information in encrypted form - Information subject to copy restriction requests is transmitted in encrypted form using the session key.

In the proposed standard, a central authority is responsible for reviewing and certifying devices as complying with 5C Standard copy control requests.

FIG. 1 illustrates conventional device 100 for implementing the 5C Standard. Device 100 includes authentication and key exchange subsystem 116, optional system renewal subsystem 114, content cipher subsystem 120, IEEE 1394 bus interface 118, storage device 112 for storing video data to be transmitted as well as received video data, and digital bus 122 which is 1394 compliant.

In this system, authentication messages, system renewal messages, authentication keys, exchange keys and session keys, in addition to encrypted data, are passed between the system 100 and other devices via the bus 122. Interface 118 is responsible for electrically interfacing between bus 122 and system elements, such as authentication and key exchange subsystem 116 content cipher subsystem 120. The authentication and key exchange subsystem receives and exchanges, via bus 122, authentication and key information as well as system renewal messages. The content cipher subsystem is responsible for encrypting video information prior to transmission and decoding received encrypted information using content keys provided by authentication and key exchange system 116, to the cipher subsystem.

Storage 112 stores un-encrypted video data, copyright status and system renewal information. The system renewal and copyright status information is provided to authentication and key exchange subsystem 116. The video residing in the storage device 112 is supplied to, or received from, the content cipher subsystem which is responsible for encoding/decoding video information passed over bus 122.

In the conventional device, copy protection status information is included in an initial transmission of data between devices along with authentication information, e.g., authentication keys. Copy protection status information indicates that encrypted data can be copied freely, copied for one generation

(copy-one-generation), never copied (copy-never) or is subject to a no more copies constraint (no-more-copies). An authentication key is established during authentication, which occurs at the beginning of each exchange of encrypted information between source and destination devices. The authentication key is used to encrypt an exchange key. The exchange key is used to establish and manage security of copyrighted content streams. A content (session) key is exchanged between source and destination devices in conventional device 100. The content key is used to encrypt/decrypt the content being exchanged. Authentication and key exchange subsystem 116 provides the content key, associated with a particular communication, to content cipher subsystem 120 for use in encoding/decoding the content being transmitted or received.

The 5C Standard was designed primarily for digital CE devices. A housing of such devices can normally be sealed in such a manner as to make access to the inside of the device difficult -- particularly since consumers rarely need access to the insides of devices such as television sets and VCRs. Furthermore, an amount of control a consumer can have over the data processing performed by most CE devices can be limited to a set of preselected operations, e.g., play, reverse, stop, etc.

Computer owners are accustomed to having easy access to internal components of their systems for upgrading and component replacement purposes. Accordingly, in most cases it would be unacceptable to

seal computer housings in such a manner as to deny the owner easy access to internal components of his(her) computer system. In addition, one strength of a personal computer is that it can run arbitrary programs that can interact at a low-level with computer hardware and an operating system. Practically, this means that if unencrypted bits flow through a computer system, often a process can be crafted to steal, e.g., copy, them.

For this reason, computers generally raise more concerns with regard to potential pirating of copyrighted information than, e.g., televisions and other CE products. Because of the ease with which copyrighted data can be copied by computer systems, it is unlikely that computer systems, e.g., personal computers (PCs), are likely to be certified as devices which implement the 5C Standard copy control requests with sufficient certainty to support issuance to it of a 5C certificate. Without such a certificate, a device will be unable to interact and exchange copyrighted information subject to copy constraints with 5C Standard CE devices. The likely inability for a computer system, as a whole, to be certified as a 5C Standard compliant device poses the threat that, in the future, computer systems will be unable to interface with many CE devices.

Another threat to computer system and CE device interoperability has been created by the film industry. A least one major film studio has threatened to refuse licensing high-resolution video if such video will be transmitted on unencrypted analog interconnects.

If copyright owners maintain such a position, it would preclude computer devices from transmitting HDTV to monitors using unencrypted analog lines. The purpose of this 5C Standard is to secure upcoming high-resolution video formats by making it difficult for individuals to connect recorders into the analog stream between a video player and the monitor. A problem with this standard is that it will increase the costs of monitors and video cards.

Unfortunately, an inability to receive certification for a computer system as 5C compliant would prevent that system from displaying copy retrieved movies and other high definition video content where the video is transmitted to a monitor using conventional unencrypted analog monitor interconnects.

In view of the above discussed threats to computer system/CE device interoperability, a need now exists for methods and apparatus that would allow a computer system, or at least a portion of a computer system, to interface and exchange data with 5C Standard devices subject to copy restrictions. In addition, a need also exists for methods and apparatus of implementing some form of encryption or scrambling of video signals on analog interconnects to address concerns of copyright owners regarding unauthorized copying of analog signals. From a commercial standpoint, it is desirable that any new methods and apparatus be at least

somewhat backward compatible and be capable of being implemented at a reasonable cost.

SUMMARY OF THE PRESENT INVENTION

5

The present invention is directed to methods and apparatus for preventing the unauthorized copying or use of the content of transmitted and/or stored information, e.g., video and/or audio signals. As
10 discussed above, it is unlikely that computer systems, as a whole, will be able to qualify for and obtain certificates indicating 5C Standard compliance.

To partially counter this difficulty, one
15 feature of the present invention is directed to rendering at least one component of a computer system capable of obtaining a 5C certificate thus allowing that component to interact with 5C Standard compliant devices.

20 In accordance with our specific inventive teachings, a display adapter, e.g., an MPEG video card, is rendered 5C Standard compliant, hence forming a "secure video card". This adapter includes an interface for coupling the card to a digital bus, e.g., 1394
25 Firewire, used to couple 5C standard devices such as a DVD player, to other 5C Standard compliant devices. The interface of the secure video card is also coupled to a bus within the computer system. However, to guard against unauthorized copying of copyrighted information
30 subject to 5C Standard copyright restrictions, such information is only allowed to be passed external to the

video card, e.g., to a hard disk for storage, in encrypted form. A content encryption key is maintained on the secure video card, thereby precluding decoding of the encrypted data, once stored, or its copying.

5

In this manner, a video card can qualify for a 5C certificate and the computer system incorporating the video card can be used to receive, copy, distribute and, in some cases, display copyrighted content subject to 5C Standard copy restrictions.

10

Our inventive secure video card is designed to be tamper-resistant and to prevent easy access to unencrypted signals, e.g., it may be coated with an epoxy material. Processing of the copyrighted information subject to the 5C Standard copyright constraints, in unencrypted form, is restricted, to occurring just on the card. In this way, many of the concerns copyright owners harbor concerning information being stolen, as the result of processing by the main CPU of a PC, can be avoided.

15

20

In addition to addressing 5C Standard compliance issues, our present invention addresses the concerns some copyright owners have regarding the transmission of video signals over analog lines.

25

In accordance with our inventive teachings, analog video signals are transmitted from a source device, e.g., a video adapter, to a destination, e.g., display device such as, a monitor, over a plurality, e.g., three, video signal lines. Prior to transmitting

30

information to the destination device, the identity of the destination device is confirmed via receipt, by the source device, of a certificate, e.g., authentication key, assigned to the destination device by a central authority. A session key, used as a content encryption key, is then generated and exchanged between the source and destination devices. The source and destination devices each includes a pseudo-random number generator that is driven by the session key. The three video signal lines, which are used to transmit the red, green and blue analog video signals, are changed, e.g., swapped, on a periodic basis as a function of the output of the pseudo-random number generator in the source device. In one embodiment, the red, green and blue signals are also altered, e.g., encrypted, by multiplying signal values by coefficients produced by the pseudo-random number generator thereby frustrating any decoding of these video signals by detecting correlations among the signal values. An input to the pseudo-random number generator in the destination device is synchronized with the random number generator in the source device via the exchange of session keys. The number generator in the destination device drives a decryption circuit which performs an inverse swapping and multiplying operation to that performed by the source device, thereby re-generating the analog red, green and blue color signals. In this manner, the video signals received on the three analog lines can be properly recombined to form proper red, green and blue video signals.

Our inventive video adapter can detect when it is coupled to a display device when the latter is also implemented in accordance with our present invention. When connected to a conventional display device, e.g., a monitor, the video adapter limits its display output to non-encrypted analog video signals which do not include information subject to a restriction precluding transmission over unencrypted analog transmission lines. When connected to a display device that has been implemented in accordance with the present invention, the video adapter generates encrypted analog video signals and periodically exchanges a session key with the display device, which, in turn, is used for decoding the transmitted video signals. Thus, our inventive display adapter provides some degree of backwards compatibility in that it can be used with existing monitors and with new display adapters that embody our present invention. In addition, since the display adapter can be added to conventional computer systems, e.g., in place of conventional display adapters, our inventive adapter provides a way of adding 5C Standard compatibility and new display features, but with very few modifications, to an existing computer system.

BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

Fig. 1 depicts a block diagram of a conventional device capable of implementing the proposed 5C standard for secure communication of information in consumer electronic devices;

5

Fig. 2 illustrates a computer system implemented in accordance with one embodiment of our present invention;

10

Fig. 3 illustrates a display adapter and display device coupled together in accordance with our present invention;

15

Fig. 4 depicts a flow chart illustrating the operation of our inventive display adapter;

Fig. 5 illustrates our inventive display adapter of the present invention in greater detail;

20

Fig. 6 illustrates display device 247, as shown in FIG. 2, in greater detail; and

25

Fig. 7 illustrates a matrix multiplication operation that may be used to encrypt video signals in accordance with one exemplary embodiment of the present invention.

30

Fig. 8 illustrates a display adapter implemented in accordance with another exemplary embodiment of the present invention.

Fig. 9 illustrates the steps performed by a video signal encryption circuit in accordance with one exemplary embodiment of the present invention.

5 Fig. 10 illustrates a display device capable of decrypting and displaying video signals generated by the display adapter of Fig. 8.

10 Fig. 11 illustrates the steps performed by a video signal decryption circuit in accordance with one exemplary embodiment of the present invention.

15 Fig. 12 illustrates a value mapping circuit of the present invention.

20 Fig. 13 illustrates an encryption circuit suitable for use in the display adapter illustrated in Fig. 8.

25 Fig. 14 illustrates a video signal decryption circuit suitable for use in the display device illustrated in Fig. 10.

30 Fig. 15 illustrates a MUX suitable for use in the value mapping circuit illustrated in Fig. 12.

DETAILED DESCRIPTION

35 As discussed above, the present invention is directed to methods and apparatus for preventing the

unauthorized copying or use of the content of transmitted and/or stored information, e.g., video and/or audio signals.

5 Those skilled in the art will recognize that the present invention may be effected by a wide range of devices, other than just a personal computer (PC), and particularly, specific circuitry therein. Program modules that incorporate our inventive teachings may
10 include routines, programs, objects, components, data structures, etc. that perform a task(s) or implement particular abstract data types. Moreover, those skilled in the art will appreciate that at least some aspects of the present invention may be practiced with other
15 configurations, including hand-held devices, multi-processor systems, microprocessor-based or programmable consumer electronics, network computers, minicomputers, set-top boxes, mainframe computers, displays used in, e.g., consumer electronics
20 applications, automotive, aeronautical, industrial applications, and the like. At least some aspects of the present invention may also be practiced in distributed computing environments where tasks are performed by remote processing devices linked through a communications
25 network. In a distributed computing environment, program modules may be located in local and/or remote memory storage devices. Nevertheless, to facilitate understanding, we will discuss our invention in the context of various embodiments that would be used in a PC
30 environment.

FIG. 2 and the following discussion provide a brief, general description of an exemplary apparatus in which at least some aspects of the present invention may be implemented. Various methods of the present invention will be described in the general context of computer-executable instructions, e.g., program modules, being executed by a computer device such as computer system 220 or display adapter 248. Other aspects of the invention will be described in terms of physical hardware such as, e.g., display adapter circuits and display device components.

System 200 includes general purpose computing device 220 taking the form of, e.g., a PC. PC 200 may include processing unit 221, system memory 222 and system bus 223 that couples various system components including the system memory to processing unit 221. System bus 223 may be any of several types of bus structures including a memory bus or memory controller, a peripheral bus, and a local bus using any of a variety of bus architectures. The system memory may include read only memory (ROM) 224 and/or random access memory (RAM) 225. Basic input/output system 226 (BIOS), including basic routines that transfer information between elements within PC 220, such as during start-up, may be stored in ROM 224. PC 200 may also include hard disk drive 227 for reading from and writing to a hard disk (not shown), magnetic disk drive 228 for reading from or writing to (e.g., removable) magnetic disk 229 and optical disk drive 230 for reading from or writing to removable (magneto) optical disk 231, such as a compact disk or other

(magneto) optical media. Hard disk drive 227, magnetic disk drive 228 and (magneto) optical disk drive 230 may be coupled with system bus 223 through hard disk drive interface 232, magnetic disk drive interface 233 and a (magneto) optical drive interface 234, respectively. The drives and their associated storage media provide nonvolatile storage of machine readable instructions, data structures, program modules and other data, e.g., video data. Although the exemplary environment described herein employs a hard disk, a removable magnetic disk and a removable optical disk, those skilled in the art will appreciate that other types of storage media, such as magnetic cassettes, flash memory cards, digital video disks, Bernoulli cartridges, random access memories (RAMs), read only memories (ROM), and the like may be used instead of, or in addition to, the storage devices introduced above.

A number of program modules may be stored on hard disk 223, magnetic disk 229, (magneto) optical disk 231, ROM 224 or RAM 225, such as, e.g., operating system 235, one or more application programs 236, other program modules 237 and/or program data 238. A user may enter commands and information into PC 220 through input devices, such as, e.g., keyboard 240 and pointing device 242. Other input devices (not shown) such as a microphone, joystick, game pad, satellite dish, scanner, or the like may also be included. These and other input devices are often connected to the processing unit 221 through serial port interface 246 coupled to the system bus. However, input devices may be connected by other

interfaces, such as a parallel port, a game port or a universal serial bus (USB) -- all of which are not shown.

5 A display device, e.g., monitor 247,
implemented in accordance with the present invention is
connected to system bus 223 via an interface, such as
inventive display adapter 248. In addition to being
coupled to monitor 247 and system bus 223, display
adapter 248 is coupled to external DVD player 251 via
10 IEEE 1394 standard digital data bus, e.g., 1394
Firewire 249. Video adapter 248 can receive encoded
video via bus 249 or unencoded video via, e.g., system
bus 248. Bus 249 connects video adapter 248 directly to
5C Standard compliant CE devices without having to pass
15 encrypted information from a CE device through other
computer system components.

As will be discussed below, monitor 247 is
capable of interacting and exchanging identification
20 certificates (authentication keys) and session keys, in
accordance with the present invention, with video
adapter 248.

In addition to monitor 247, PC 220 may include
25 other peripheral output devices (not shown), such as,
e.g., speakers and printers.

PC 220 may operate in a networked environment
which defines logical connections to one or more remote
30 computers, such as remote computer 259. Remote
computer 259 may be another PC, a server, a router, a

network computer, a peer device or other common network node, and may include many or all of the elements described above relative to PC 220, although only memory storage device 250 has been illustrated in FIG. 2. The logical connections depicted in this figure include local area network (LAN) 251 and wide area network (WAN) 252, which may comprise, e.g., an intranet and Internet, respectively.

When used in a LAN, PC 220 may be connected to LAN 251 through network interface card (adapter) ("NIC") 253. When used in a WAN, such as the Internet, PC 220 may include modem 254 or other means for establishing communications over the wide area network. The modem, which may be internal or external, may be connected to system bus 223 via serial port interface 246. In a networked environment, at least some of the program modules depicted relative to PC 220 may be stored in the remote memory storage device. The network connections shown are exemplary and other means of establishing a communications link between the computers may be used.

FIG. 3 illustrates display adapter 248 and display device 247, shown in FIG. 2, embodiment coupled together in accordance with the present invention. As illustrated, video adapter 248 can receive input from either system bus 223 or 1394 Firewire 249. In addition, video adapter 248 can receive monitor identification and video decoding synchronization information from display device 247 via one or more plug and play (PP) lines 312.

Video adapter 248 can supply video information to display device 247 over a plurality of analog lines, here color signal lines 302, 304, 306; vertical
5 synchronization (VS) signal line 308, and horizontal synchronization (HS) signal line 310. Lines 302, 304, 306, 308, 310, 312 are typically part of a single multi-wire cable having a conventional DB-9 end connection for plugging into a corresponding DB-9
10 connector included in an I/O interface of video adapter 248. As the result of the use of a conventional connector and pin-out arrangement, the video adapter can be connected to a conventional, e.g., VGA, monitor, or monitor 247 capable of supporting encryption.

15 FIG. 4 depicts flow chart 350 illustrating the operation of our inventive display adapter 248.

As shown, upon power up or re-initialization,
20 operation of display adapter 248 begins in step 352 wherein the display adapter 248 polls any display device, coupled thereto, to request monitor identification information. The polling may be done by transmitting a request for monitor identification information to the
25 device on any one of the lines 302, 304, 406, 308, 310 or 312 and then waiting for a response from the display device via one or both of PP lines 312.

Hence, after transmitting a request for
30 identification information, display adapter 248 monitors,

in step 354, PPLines 312 for a response from the display device.

5 If a response to the request is not received in
a preselected amount of time (a "timeout" interval),
e.g., 1 second, as determined by decision step 356,
display adapter 248 assumes that it is connected to a
conventional analog display device, e.g., VGA monitor.
Operation then proceeds to step 362. Through step 362,
10 display adapter 248 restricts video output via the those
analog lines (302, 304 and 306, as shown in FIG. 3) to
video information which is not subject to a restriction
prohibiting transmission of that information over
unencrypted analog lines. From step 362 shown in FIG. 4,
15 operation proceeds to step 364 wherein the lines 302,
304, 306 are used as R, G, and B analog video lines
respectively, with analog video information being
transmitted over these three lines to display device
coupled to display adapter 248.

20 Video output occurs in step 364 until the
system is reset or power is turned off causing, in
step 370, operation of the display adapter to stop.

25 If, in step 356, a response to the request for
display device identification information is detected
within the timeout interval, then operation proceeds to
step 358 wherein the identification information is
examined. The identification information may be the same
30 as or similar to the type used in the 5C Standard and

include a digital certificate used to confirm the identity of the display device.

5 If the examination reveals, as determined by decision step 360, that the display device coupled to adapter 248 is not an encryption capable device, operation proceeds, via step 360, to step 362.

10 However, if the examination in step 358 reveals that the display device is a line swapping capable device, operation proceeds, via step 360, to step 366. This latter step periodically exchanges session key and synchronization information with the display device. This may involve, for example, the display adapter
15 transmitting synchronization and session key information to display device 247 on one or all of the signals appearing on signal lines 302, 304, 306 during a vertical blanking period.

20 With the exchange of a session key, display adapter 248 is ready to produce encrypted analog video signals on signal lines 302, 304, 306 which connect display adapter 248 to display 247. These signals are produced and applied to display device 247 through
25 step 368. The periodic exchange of session key and synchronization information, as well as the supply of encrypted video signals to display 247, which occur in steps 366 and 368, continues until operation of display adapter 248 or display device 247 halt in step 370, e.g.,
30 due to power being turned off or a re-set operation being performed.

FIG. 5 illustrates our inventive display adapter 248. Display adapter 248 may be implemented, e.g., as a separate plug-in card or incorporated directly into a motherboard of a computer system. As illustrated, the display adapter comprises input/output interface 402, video processor 404, video signal encryption circuit 406, I/O interface 412, memory 405, 1394 content cipher subsystem 414, authentication and key exchange system 416, pseudo-random number generator 410 and matrix inverter circuit 408 coupled together as shown. The display adapter may include optional system renewal subsystem 114 (shown in FIG. 1) coupled to authentication and key exchange subsystem 416.

I/O interface 402, shown in FIG. 5, includes system bus interface (SBI) 402A for interfacing between system bus 223 and display adapter components including video processor 404. In addition, I/O interface 402 includes IEEE 1394 interface 249 to facilitate interaction via the 1394 Firewire 249 between 5C Standard compliant devices and various components of the display adapter, e.g., 1394 content cipher subsystem 414 and authentication and key exchange system 416.

1394 content cipher subsystem 414 may be the same as, or similar to, that used in conventional known device 100 (as shown in FIG. 1). Content cipher subsystem 414, receives, from authentication and key exchange subsystem 416, the content (session) key to be used for encoding/decoding information being processed

during a communication session and/or information relating to the encryption algorithm to be used. The content cipher subsystem decodes encoded data received via 1394 Firewire 249. Subsystem 414 also encodes data subject to copyright restrictions in accordance with the 5C Standard prior to transmission of that data via 1394 Firewire 249.

I/O interface 402 serves to couple 1394 content cipher subsystem 414 to video processor 404 and system bus 223. Decoded video output produced by content cipher subsystem 414, copy restrictions permitting, can be transmitted over system bus 223 or processed by video processor 404. Video data processed by video processor 404 can be applied to a display via the digital matrix multiplier 406 and second I/O interface 412.

In accordance with our inventive teachings, encrypted data received via 1394 interface 402B can be stored and transmitted in encrypted form in a portion of PC 220 which is external to display adapter 248. However, to do so, the session key associated with the encrypted data would be maintained within secure display adapter 248 in, e.g., non-volatile memory 405. In this manner, the video data, being in encrypted form outside adapter 248, is thus protected, from unauthorized copying or editing. Since the display adapter stores the session key, stored encrypted video information can be played back at some future time through this adapter without compromising data security. This allows encrypted video information subject to copy restrictions to be stored

safely, e.g., on hard disk 227 and later accessed,
decrypted and rendered through the same display adapter.
Doing so may be useful for some business and home
applications where there is likely to be a delay between
5 when copy restricted video information is received and
ultimately viewed.

Note that for processing traditional non-secure
video received over the 1394 Firewire, PC 200 (see
10 FIG. 2) may edit this video information, save to disk,
etc. in unencrypted form. However, when operating in
secure mode, e.g., when processing information subject to
copy restrictions, portions of PC 200, other than the
display adapter, act as a pipe for the encrypted data and
15 a repository for secure content.

Video processor 404, shown in FIG. 5, processes
the received video signals, for performing various
processing operations thereon, and controls operation of
20 video signal encryption circuit 406. Possible signal
processing operations include, e.g., decoding MPEG video
data, editing data, and converting digital video data
and/or images into analog red, green and blue video
signals. Video processor 404 may be implemented as a
25 digital signal processing circuit with digital-to-analog
(D/A) converters for generating the analog output
signals. In addition to generating the red (R),
green (G), and blue (B) analog video signals, video
processor 404 generates vertical synchronization signals,
30 horizontal synchronization signals, and display
information request signals, and also responds to

information provided, via plug and play line 312, by the display device.

Video processor 404 is coupled to memory 405 wherein various control routines 407 are stored. The memory may also include image processing routines. The control routines control video processor operation and display interaction, e.g., in accordance with the steps 350 shown in FIG. 4.

In addition to storing control routines 407, memory 405 may store authentication keys (certificates) 418, exchange keys 420 and content/session keys 422. The authentication keys are used for proving the identity of display adapter 248 to other devices. Exchange keys are used for encrypting messages sent to devices coupled to display adapter 248. Content/session encryption keys are used for encrypting signals transmitted by the display adapter to a device coupled thereto, e.g., a 5C Standard compliant device or display device 247 that implements our inventive analog signal encryption technique.

Video processor 404 generates unencrypted R, G, and B video signals and also controls video signal encryption circuit 406 via CTRL signal.

When operating with a conventional monitor, i.e., a monitor that does not support encryption of analog video signals, the video processor limits its analog video signal output to video signals which are not

subject to an analog signal encryption requirement. In such a case, video processor 404 controls video signal encryption circuit 406, via the CTRL signal, to output the R, G and B video signals without making alterations thereto. In such a case, the R, G and B video signals are output as analog video signals R', G' and B', respectively. These signals are then output via I/O interface 412 via corresponding signal lines 302, 304 and 306. I/O interface 412 may include a standard monitor connection for connecting the display adapter to conventional display devices as well as to inventive display device 247. In this manner, display adapter 248 can interact with conventional display devices.

When interacting with display device 247, video signal encryption circuit 406 is controlled by processor 404 so that the analog R, G and B video signals generated by the video processor are encrypted to generate video signals R', G' and B', respectively.

The encryption of the analog signals is performed as a function of a session key generated by authentication and key exchange system 416. The session key is used to drive pseudo-random number generator 410. The output of the pseudo-random number generator can be used directly by video signal encryption circuit 406, e.g., in the case of self inverting matrices or, alternatively, it may first be processed by matrix inverter circuit 408. The matrix inverter circuit processes the output of the pseudo-random number generator to ensure that the processing performed by

video signal encryption circuit 406 will be the inverse of that performed by display device 247 when it receives the encrypted analog video signals.

5 In one relatively simple embodiment, the video signal encryption circuit swaps, as a function of the pseudo-random number generator output, the R, G, and B video signals to generate video signals R', G' and B'. Here, the signals on lines 430, specifically 430a, 430b and 430c, represent signals generated by switching the
10 input to each line so that at any given time it is difficult to determine which of these three lines is being used to transmit the R, G, and B video signals. In such an embodiment, the R, G and B signals between the
15 display adapter and monitor are pseudo-randomly swapped on a line-by-line basis. A session key, exchanged with the display device is used to drive pseudo-random number generator 410. Since the session key and pseudo-random number generation techniques are common to both the
20 display adapter and display device, the display device can perform the inverse swapping operation to properly reconstruct the R, G and B video signals.

 It is expected that a video pirate may attempt
25 to decrypt analog video signals, encrypted using the above described line swapping technique, by examining the R', G' and B' video signals for inter-line correlations. To resist such an attempt, the signal on each of lines 302, 304, 306 can be composed from a keyed pseudo-random
30 linear combination of the R, G and B incoming analog video signals supplied to video signal encryption circuit

406. As a result of such a combination, simple
inter-line correlations will not reveal coefficients used
during encryption which otherwise could allow the pirate
to recover the original signal. Significantly, while
5 being difficult to break, our inventive encryption scheme
can be implemented using relatively inexpensive circuitry
that is rather simple to manufacture.

In particular, the encryption performed on the
10 received R, G and B video signals to generate
"transformed" first (R'), second (G'), and third (B')
video signals can be expressed as follows:

$$R' = a_1R + b_1G + c_1B$$

$$15 \quad G' = a_2R + b_2G + c_2B$$

$$B' = a_3R + b_3G + c_3B$$

where:

20 R, G and B are original color video signals;
R', G', and B' are transformed "encrypted"
first, second and third video signals; and
a_n, b_n and c_n are coefficients generated using a
pseudo-random number generator, e.g.,
25 generator 410, driven by a session key.

Our inventive encryption and corresponding
decryption transformations may be implemented as matrix
multiplication operations where all or some of the matrix
30 coefficients are generated by, or are a function of, the

output of a pseudo-random number generator driven by a session key.

Such video signal encryption and decryption may be done using either digital or analog circuitry. For example, it may be accomplished on display adapter 248 using digital circuitry implemented as part of a digital signal processor which serves as video processing circuit 404. In the display device, e.g., monitor, where little or no DSP circuitry may be present, the decrypting may be done using analog circuitry.

Use of matrix inverter 408 ensures that the encoding/decoding operations will be the inverse of one another. It may, in some cases be easier to implement matrix inverter 408 using digital signal processor circuitry rather than through analog circuitry. Accordingly, it may be desirable to incorporate matrix inverter 408 into the inventive display adapter which is more likely, than the display device, to include a digital signal processor having extra processing capacity. However, if desired, matrix inverter 408 could be included in display device 247 as opposed to display adapter 248.

In accordance with our inventive teachings, a session key is used to drive pseudo-random number generator 410. However, before a session key can be established, as discussed above with regard to FIG. 4, display adapter 248 first verifies that the receiving device is a trusted display, in contrast to a pirate

video recorder, via the exchange of a certificate
identifying the display device. This may be done by,
e.g., transmitting information to the display device via
one or more of video lines 302, 304, 306, vertical and
5 horizontal sync lines 308, 310 and plug and play
line 312. Information from the display device may be
received by video processor 404 via plug and play
line 312. During normal operation, session key and
synchronization information may be transmitted to the
10 display in the horizontal or vertical blanking portion of
the video signals.

Verifying the identity of the receiving, e.g.,
display, device and establishing a session key to be used
15 for encrypting information transmitted between display
adapter 248 and our inventive display 247 is similar to
the verification and session key establishment problems
addressed by the 5C standard.

Advantageously, the same type of digital
certificate and content key used by 5C Standard devices
is used by our present invention. However, the
communication between the display adapter and display is
over one or more of lines 302, 304, 306, 308, 310, 312
20 and not 1394 Firewire. Thus, the analog encryption
scheme of the present invention is well suited for use in
5C standard devices where the establishment and exchange
of session keys as part of an analog encryption session
may be implemented using much of the authentication and
25 key exchange functionality provided for 5C Standard
compliance, e.g., authentication and key exchange
30

system 416. Accordingly, our inventive analog encryption scheme is well suited for use in conjunction with, or as an enhancement to, the 5C Standard. Authentication and key exchange system 416 is coupled to video processor 404 to facilitate use of system 416 in establishing and maintaining analog video encryption sessions.

As discussed above, a session key is used to drive pseudo-random number generator 410 which generates coefficient values used during encryption/decryption. A rate at which the session key is changed affects the level of security provided. To increase the complexity of cryptanalysis required to break the encryption, as compared to embodiments which do not modify the session key during an established communication session, a new session key can be used for each scan line of an image being transmitted to the display. For enhanced security, the session key can be modified multiple times during a single scan line thereby varying the coefficients used to encode the video signals corresponding to a scan line.

As discussed above, to eliminate a need for an inversion circuit and/or matrix inversion operation, self-inverting matrices may be used. FIG. 7 illustrates a matrix multiplication operation that may be performed by the video signal encryption circuit to encrypt R, G and B video signals. Reference numeral 602 indicates a self-inverse matrix that can be used to encrypt R, G, and B signals.

From a security standpoint, the values of the matrix used for encryption/decryption should be such that the matrix remains non-singular.

5 For decoding to accurately occur, display adapter and display device 247 need to be synchronized such that the correct session key is used for decoding each line of both transmitted and received video images. Synchronization should occur promptly after loss of
10 synchronization, e.g., due to loss of power or a noise signal. One approach to maintaining synchronization is to periodically establish a new session key, e.g., every few seconds, e.g., 5 seconds.

15 In the event display device 247 loses power, this display device can signal the display adapter via one of plug and play lines 312 to establish a new session key.

20 Alternatively, the display device can actively monitor and detect loss of adapter/display synchronization. Specifically, the display adapter transmits a frame counter value to the display device during each vertical blanking period. The display device
25 maintains its own count of received frames which it then compares to a value provided by display adapter 248. If a mismatch between the frame count provided by the display adapter and that maintained in the display device is detected by the latter, the display device signals the
30 display adapter 248 to initiate a re-synchronization operation.

Having described our inventive video encryption method and the interaction of video adapter 248 and display device 247, we will now describe display device 247 in detail.

FIG. 6 illustrates an exemplary embodiment of display device 247. This device includes I/O interface 502, display control logic 504, video signal decryption circuit 506, display 523, pseudo-random number generator 510 and authentication and key exchange system 516 coupled together as shown. Display device 247 may also include (though not shown) an optional system renewal subsystem coupled to authentication and key exchange system 516.

I/O interface 502 connects various components of the display device to signal lines 302, 304, 306, 308, 310 and 312 which collectively couple display device 247 to display adapter 248. I/O interface 502 may include a standard monitor cable connector, e.g., a DB-9 connector, for line connection purposes.

Display control logic 504 controls various display operations, e.g., screen width, etc. under control of, e.g., a stored routine, located in memory (not specifically shown) situated within display control logic 504.

Control logic 504 detects synchronization loss and, in response, initiates re-synchronization. In order

to detect display adapter/display device synchronization loss, display control logic 504 maintains a frame count, as discussed above, and compares that count to frame count information provided by display adapter 248. If a
5 mis-match is detected between these frame counts, control logic 504 initiates a re-synchronization operation which involves establishment of a new session key.

Authentication and key exchange system 516
10 interacts with display adapter 248 and stores keys 522, 520, 518 used for decoding received data, communicating with other device and proving authenticity of display device 247. Certificates containing, e.g.,
15 authentication keys 518, are stored in a memory (also not shown) which forms part of system 516. Keys 518, 520, 522 may be stored in non-volatile tamper-resistant memory, e.g., an epoxy coated memory device, to prevent unauthorized access to these keys.

20 The session key established by the authentication and key exchange system serves as input to pseudo-random number generator 510. The output of the pseudo-random number generator is used by the video signal decryption circuit 506 in performing a decryption
25 operation. The pseudo-random number generator output represents matrix coefficients which are used as part of a matrix multiplication operation performed by video signal decryption circuit 506. Hence, a session key drives the pseudo-random number generators, used for
30 encrypting and decrypting, in display adapter 248 and display 247, respectively.

Video signal decryption circuit 506 performs, as a function of the pseudo-random number generator output, inverse processing to that performed by encryption circuit 406 of display adapter 248. In this manner, the signals R', B', G' received via lines 302, 304, 306 are converted back into the unencrypted R, G, and B video signals. The unencrypted R, G and B signals are supplied, along with the vertical and horizontal synchronization signals, to display 523 which may be, e.g., a cathode ray tube (CRT) or liquid crystal display (LCD).

While the swapping of analog signals on lines 302, 304 and 306 provides a high degree of security, individual R, G and B signals can be encrypted by simply using the output of the pseudo random number generator 410 to provide coefficients which are used to modify analog signal values, e.g., amplitude values. By varying these coefficients over time and using different coefficients for encrypting each of the R, G and B signals, adequate protection against unauthorized copying and use may be achieved.

As discussed above, in accordance with various embodiments of the invention, analog R, G, B video signals are processed, e.g., subjected to a matrix multiplication operation, to form encrypted R', G', and B' video signals. In such an embodiment, the R, G, and B signal combinations used to form the R', G' and B' video signals may be varied as a function of the output of a

pseudo random number generator which supplies matrix coefficient values.

In one particular exemplary embodiment the values in the matrix which are multiplied with the R, G, B signals are controlled so that two of the three R, G, and B signals are added and one subtracted to form each of the analog encrypted R', G', B' video signals. In such an embodiment, since each one of the transmitted encrypted analog video signals is produced from the three signal components, it is considerably more difficult to decrypt than the case where R, G, B signals are subject to permutation matrix as opposed to combining the signals to produce the encrypted R', G', B' signals.

A display adapter 848 capable of generating encrypted analog R', G' and B' signals from unencrypted analog R, G, B signals, with each encrypted signal being a function of one or more of the unencrypted analog signals, is shown in Fig. 8. The display adapter 848 includes many components which are the same as, or similar to those previously discussed with regard to Fig. 5. Such components are identified in Fig. 8 using the same reference numerals as used in Fig. 5 and will not be described again in detail. Note that the display adapter 848 includes a pseudo random number generator 810 and video signal encryption circuit 806 which perform similar functions to those of the like named Fig. 5 components. Due to implementation issues relating to the encryption circuit 806, and restrictions on the values which can be generated by the pseudo random number generator 810,

these circuits may be implemented using hardware and/or software that differs from that used to implement the like named circuits found in the Fig. 5 embodiment.

5 In addition to the above discussed components, the display adapter 848 includes a value mapping circuit 808 which is not present in the Fig. 5 embodiment. The operation of the value mapping circuit 808 will be discussed in detail below.

10 In accordance with one feature of the invention, the pseudo random number generator 810 operates in response to input from the authentication and key exchange system 416 to periodically generate a set A' of values representing a 3x3 RLC (restricted linear
15 combination) permutation matrix of 0's and 1's. Since the matrix is a 3x3 matrix, 9 values are output by the generator 810 for each encryption period, e.g., the time during which a line of a video display is transmitted. A
20 tenth value α , which will be discussed below, may also be output for each encryption period.

 As a result of restrictions on the possible values in the 3x3 matrix, a single 1 and two 0's will be
25 included in each row and column of the 3x3 matrix A'. That is, we start from any 3 x 3 ordinary permutation matrix A' which can be used to swap the lines used to transmit R, G, and B signals.

5

10

15

20

$$A = \begin{bmatrix} 1 & -1 & 1 \\ 1 & 1 & -1 \\ -1 & 1 & 1 \end{bmatrix}$$

This is an example of a Restricted Linear Combination.
More generally, we can in addition multiply the matrix by
a scalar, e.g., a value in the range of 1 to 10.

5 Note that as a result of the above discussed
restriction on matrix coefficient values, each column and
each row of values in the matrix includes two of the same
values and one value that is different. Further note
that the two matching values are positive and the other
10 value is negative.

 The set A of mapped permutation values is
supplied to the video signal encryption circuit 806 of
the present invention. As in the Fig. 5 embodiment, the
15 video signal encryption circuit performs a matrix
multiplication through the use of, e.g., analog
multipliers, to generate the inner product, vector V' , of
the supplied R, G, B analog video signals and the
permutation matrix A. The matrix multiplication
20 operation performed by encryption circuit 806 produces
the vector V' . The vector V' comprises the encrypted
analog video signals R' , G' , B' .

 As a result of the above discussed restrictions
25 placed on permutation matrix values, each of the
encrypted signals R' , G' and B' will be a function of
three input signals R, G, B. This can make the encrypted
signals harder to decrypt for unauthorized individuals
than in the previously described embodiments.

30

 Given a mapped permutation matrix A:

Let A_i denote row i of matrix A .

$$A = \begin{bmatrix} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \\ a_3 & b_3 & c_3 \end{bmatrix} = \begin{bmatrix} A1 \\ A2 \\ A3 \end{bmatrix}$$

5 The generation of the encrypted set of signals V' may be expressed as:

$$V' = V * A = \begin{bmatrix} R \\ G \\ B \end{bmatrix} * \begin{bmatrix} A1 \\ A2 \\ A3 \end{bmatrix} = \begin{bmatrix} R' \\ G' \\ B' \end{bmatrix}$$

10 The steps 700, performed by the video signal encryption circuit 806, to encrypt R , G , B video signals as a function of the mapped set A of permutation matrix values, are shown in Fig. 9

15 Analog video signal encryption begins in start step 702 wherein the mapped set A of permutation matrix values and the analog R , G , B video signals, representing the vector V , are received by the encryption circuit 806.

20 Then, in step 704, the inner product V' is generated by performing a matrix multiplication operation $V*A$. The vector V' resulting from the matrix multiplication operation comprises analog output signals
25 R' , G' and B' . In step 706, the encrypted analog video signals R' , G' and B' are output on their respective signal lines 430A, 430B, 430C.

The generation and outputting of the encrypted analog video signals R' , G' , B' performed in steps 704, 706 continues until a new set of mapped permutation values is supplied to the video encryption circuit 806. With a new set A of mapped permutation values being supplied to the encryption circuit 806, encryption using the previously supplied permutation values is halted in step 708.

As in the case of the Fig. 5 embodiment, the permutation matrix A' , and thus mapped permutation matrix A , will be altered periodically in response to signals output by the authentication and key exchange system 416. Thus, the mapped permutation matrix used for encoding signals may vary periodically, e.g., from video line to video line or e.g., after the transmission of every n lines of video signals.

In the Fig. 8 embodiment, as a result of the mapped permutation matrix values used by encryption circuit 806, the encrypted analog video signals R' , G' and B' will be a composite of the three analog input video signals, e.g., it may be a function of the sum of two signals minus the third signal. Because of the restrictions on the matrix used to generate the encrypted video signals R' , G' , B' , each of the original R , G , and B analog signals can be generated at decryption time from a different pair (R', G') , (G', B') , (B', R') of the encrypted analog video signals. As the permutation matrix used for encryption purposes is varied, the

encrypted signal pair from which the R, G, and B signals are generated will vary. This reflects the fact that, over time, as the permutation matrix is varied, the transmission lines used to transmit the encoded analog signals from which the R, G, and B signal components are reconstructed will vary.

Having described encryption of the analog R, G, B video signals as performed by the display adapter 848, decoding of the generated composite encrypted R', G' B' signals will now be described with reference to Figs. 10 and 11.

Fig. 10 illustrates a display device 947 which is capable of receiving and decrypting the R', G' B' encrypted analog video signals generated by display adapter 848. The display device 947 includes many components which are the same as, or similar to, those previously discussed with regard to Fig. 6. Such components are identified in Fig. 10 using the same reference numerals as used in Fig. 6 and will not be described again in detail. Note that the display device 947 includes a pseudo random number generator 810 and video signal encryption circuit 806 which perform similar functions to those of the like named Fig. 6 components. Due to implementation issues relating to the decryption circuit 906, and the differences in the implemented analog signal encryption between the Fig. 6 and Fig. 10 embodiments, these circuits may be implemented using hardware and/or software that differs from that used to implement the like named circuits found in Fig. 6.

In addition to the above discussed components, the display device 947 includes a value mapping circuit 808 which is not present in the Fig. 6 embodiment. The
5 pseudo random number generator 810 and value mapping circuit 808 may be implemented using identical circuitry in both the display adapter 848 and display device 947.

The authentication and key exchange system 516
10 controls the pseudo random number generator 810 to operate in a synchronized manner with the display adapter's pseudo random number generator 810. Thus, when decoding received encrypted analog video signals, R', G', B', the pseudo random number generator 810 is operated to
15 generate the set of permutation matrix values A' that was used to encrypt the received R', G', B' signals.

The value mapping circuit 808 performs a mapping operation on the set A' of matrix values to
20 generate the set A of mapped permutation matrix values. The set A of values is supplied to the video signal decryption circuit 906. In embodiments where the pseudo random number generator 810 generates α values the generated α value used to originally encode the R', G',
25 B' signals is also supplied by the pseudo random number generator 810 to the decryption circuit 906.

Video signal decryption circuit 906 decrypts the received analog encrypted video signals R', G' and B'

and outputs to display 523 the decrypted analog video signals R, G, B.

5 Decoding can be performed according to the following formula.

10 Note that for purposes of implementation, the value 4 is used instead of 3 for defining various variables. Thus, during decryption, the mapped permutation matrix value $A_1=A_1$; $A_2=A_3$ and $A_3=A_4$. In addition the binary representation of base 10 values (1,2,4) are set to correspond with signal lines (R, G, B), respectively. Let K be a 3 bit vector and let k be the corresponding base ten integer. V_k is the analog

15 signal value we assign to line k, where $k \in (1, 2, 4)$ (e.g. V_1 is the value for unencrypted R, V_2 is the value for unencrypted G, V_4 is the value for unencrypted B, and where V'_1 is the encrypted signal R', V'_2 is the encrypted signal G', V'_4 is the encrypted signal B').

20

In such an implementation, the decryption algorithm is:

Let K denote a 3 bit vector, and let k be its integer value (the usual interpretation).

25

```
for (i,j)=(1,2), (2,4), (4,1)){
    K=~Ai && ~Aj; \* bit by bit AND of negated values *\
    Vk=(V'i + V'j)/2
}
```

30

One particular embodiment of the signal decryption process 750 performed by video signal decryption circuit 906 is illustrated in Fig. 11. In Fig. 11, the value 4 is not swapped for the value 3, e.g., A3 is not set to A4, and $k=3$ is used to designate the R signal line. As illustrated the process begins in start step 752 wherein the set A of mapped matrix values including vectors A1, A2, A3 is received by the decryption circuit 906. The value α may also be received in start step 752.

The decryption process is based on the fact that, as a result of the original permutation matrix restrictions and the implemented mapping process, each pair of signals (R',G'), (G',B') and (B',R') can be used to generate one of the uncoded R, G, and B signals. This can be done by simply summing the two signals in each pair of encoded signals and dividing by 2α , e.g., using analog summing and dividing circuitry. It is also based on the fact that rows in the mapped permutation matrix A, corresponding to the rows of the vectors in a vector pair (R',G'), (G',B') and (B',R'), can be compared to identify the uncoded analog signal which can be generated from the vector pair. Each encoded signal pair may correspond to one of three possible signals (R, G, B). For the sake of convenience we can define a control value k, where a value of $k=1$ corresponds to the signal R, a value of $k=2$ corresponds to the signal G, and a value of $k=3$ corresponds to the signal B.

As will be discussed below, the control value k may be used to control which of the three possible signal lines 907, 909, 911, is used to output an uncoded video signal generated by the video decryption circuit 906.

5

The control value k , for a particular encrypted signal pair, can be easily determined by comparing the values in the corresponding rows of the mapped permutation matrix A , to identify the column k , where the corresponding rows have a value which agrees.

10

For example, the value k for the first signal pair (R', G') can be found by comparing mapped permutation matrix vectors A_1 and A_2 to find the column, k , in which they agree.

15

The value k for the second signal pair (G', B') can be found by comparing mapped permutation matrix vectors A_2 and A_3 to find the column, k , in which they agree.

20

The value k for the third signal pair (B', R') can be found by comparing mapped permutation matrix vectors A_3 and A_1 to find the column, k , in which they agree.

25

Thus, for each pair of encrypted signals (R', G') , (G', B') , (B', R') , a corresponding decrypted

30

2025 RELEASE UNDER E.O. 14176

analog video signal (V) and corresponding control value (k) is calculated as follows:

$$V_{(R', G')} = (R' + G')/2\alpha$$

5 $V_{(G', B')} = (G' + B')/2\alpha$

$$V_{(B', R')} = (B' + R')/2\alpha$$

$k_{(R', G')}$ = column location where A1 and A2 have matching values

10 $k_{(G', B')}$ = column location where A2 and A3 have matching values

$k_{(B', R')}$ = column location where A3 and A1 have matching values

The decryption process 750 performed by the video decryption circuit 906 is illustrated in Fig. 11. As illustrated the decryption process begins in start step 752 wherein the encrypted analog video signals R', G' and B' are received as well as the set A of values of the mapped permutation matrix used to encrypt the signals which are to be decrypted. α is also received in step 15 752 in embodiments where α is not fixed, e.g., set to 1. Operation proceeds from start step 752 to step 754 wherein one of a first through third decrypted video signal $V_{(R', G')}$, $V_{(G', B')}$, $V_{(B', R')}$, is generated for each pair (R', G'), (G', B'), (B', R') of encrypted video signals. 20

25 Then, in step 756, a control value k is generated for each of the first through third decrypted video signals. Then in step 758, each of the first through third decrypted video signals is output to the signal line indicated by the corresponding control value 30

k generated in step 756. In step 758, the decrypted video signal for which a control value of 1 was generated in step 756 is output on the R signal line 907; the decrypted video signal for which a control value of 2 was generated in step 756 is output on the G signal line 909; and the decrypted video signal for which a control value of 3 was generated in step 756 is output on the B signal line 911.

The generation of the decrypted analog video signals, using a given set of mapped permutation values, stops in step 760, e.g., when a new set of mapped permutation values is to be used for decryption purposes.

Since the values of k remain the same for a fixed set of mapped permutation values, the control values k need only be calculated once for each set of mapped permutation matrix values. Since analog signals are being decrypted, the analog summing and division process of step 754 is performed on a continuous basis for the duration that a set of encrypted analog signals is to be decrypted, using a supplied mapped permutation matrix A.

It will be apparent that various operations which form part of the decryption process 750, e.g., the generation of the control values k, can be performed in parallel with the generation of the decrypted analog video signals V. It will also be apparent that the generation of each of the values k and the first through third decrypted video signals V may be performed in

parallel as well if desired. Alternatively, the circuits used to generate the decrypted analog video signals or the control value k, may be used on a time shared basis. In such embodiments the generation of each of the first through third decrypted video signals and/or control values k, will occur serially.

Various decryption examples will now be discussed in detail.

Consider for example the following case where $\alpha = 1$:

$$A = \begin{bmatrix} a1 & b1 & c1 \\ a2 & b2 & c2 \\ a3 & b3 & c3 \end{bmatrix} = \begin{bmatrix} 1 & -1 & 1 \\ 1 & 1 & -1 \\ -1 & 1 & 1 \end{bmatrix} = \begin{bmatrix} A1 \\ A2 \\ A3 \end{bmatrix} ; \quad V' = \begin{bmatrix} R' \\ G' \\ B' \end{bmatrix}$$

In such a case, decryption values will be as follows:

$$V_{(R',G')} = [R' + G']/2; \quad k_{(R',G')} = 1; \quad \text{Thus } V_{(R',G')} = R$$

$$V_{(G',B')} = [G' + B']/2; \quad k_{(G',B')} = 2; \quad \text{Thus } V_{(G',B')} = G$$

$$V_{(B',R')} = [B' + R']/2; \quad k_{(B',R')} = 3; \quad \text{Thus } V_{(B',R')} = B$$

Obviously, as discussed above, a different mapped permutation matrix A could result in a different assignment of the first through third decrypted analog signals.

Consider for example the additional exemplary

case where $\alpha = 1$:

$$A = \begin{bmatrix} a1 & b1 & c1 \\ a2 & b2 & c2 \\ a3 & b3 & c3 \end{bmatrix} = \begin{bmatrix} 1 & 1 & -1 \\ -1 & 1 & 1 \\ 1 & -1 & 1 \end{bmatrix} = \begin{bmatrix} A1 \\ A2 \\ A3 \end{bmatrix} ; \quad V' = \begin{bmatrix} R' \\ G' \\ B' \end{bmatrix}$$

5 In such a case, decryption values will be as follows:

$$V_{(R',G')} = [R'+G']/2; k_{(R',G')}=2; \text{ Thus } V_{(R',G')} = G$$

$$V_{(G',B')} = [G'+B']/2; k_{(G',B')}=3; \text{ Thus } V_{(G',B')} = B$$

$$V_{(B',R')} = [B'+R']/2; k_{(B',R')}=1; \text{ Thus } V_{(B',R')} = R$$

10 An exemplary value mapping circuit 808, which may be used in the display adapter 848 and display device 947, is illustrated in Fig. 12. The illustrated embodiment assumes that the 9 values in the set A' of permutation matrix values are supplied to the value mapping circuit 808 in parallel, e.g., each on a
15 different line.

The value mapping circuit 808 comprises first through third sets of multiplexers 1002, 1004, 1006 coupled together as shown in Fig. 12. The first set of
20 multiplexers 1002 is responsible for processing the three values comprising A1, corresponding to the first row of the matrix A. Similarly, the second and third sets of multiplexers 1004, 1006 are responsible for processing the values A2, A3 in the second and third rows of the
25 matrix A, respectively.

Each set of multiplexers 1002, 1004, 1006 includes first through third multiplexers, 1010, 1012, 1014. Each of the first through third multiplexers 1010, 1012, 1014 is supplied at a control input, with a different one of the coefficient values from the vector A1, A2, or A3, which is to be mapped. First and second data inputs to the MUXes 1010, 1012, 1014 are supplied the value $+\alpha$, $-\alpha$, respectively.

In this example, α corresponds to 1. As discussed above the value α may be generated by the pseudo random number generator 810. Since an α of 1 is being used, the first data input of each MUX 1010, 1012, 1014 is supplied with +1, while the second input is supplied with the value -1.

The permutation matrix coefficient supplied to the control input of each MUX 1010, 1012, 1014 is used to determine whether the signal supplied to the first or second data inputs of each MUX will be output. In the Fig. 12 embodiment, a value of 0 supplied to a MUX control input will result in the signal $+\alpha$, e.g., 1 being output. However, a value of 1 supplied to a MUX control input will result in the signal $-\alpha$, e.g., -1 being output. Thus, MUXes 1010, 1012, 1014 provide a relatively simple way to map the set A' of 0 and 1 values to the $+\alpha$ and $-\alpha$ values of the mapped permutation matrix A.

Fig. 15 illustrates a MUX 1500 suitable for use as any one of the MUXes 1010, 1012, 1014. The MUX 1500 comprises first and second analog pass gates 1502, 1504. The first analog pass gate 1502 has a negated control
5 input while the second analog pass gate 1504 has a standard control input. The value $+\alpha$, e.g., +1, is supplied to the signal input of the first pass gate 1502 while the value $-\alpha$, e.g., -1, is supplied to the signal input of the second pass gate 1502. The outputs of the
10 first and second pass gates are both coupled to the output of the MUX 1500.

As a result of the negated input on the first pass gate 1502, the input signal (+1) to the first pass
15 gate 1502 will be output by the MUX 1500 when the control signal input is a 0. Since the control input of the second pass gate 1504 is not negated, the input signal (-1) to the second pass gate 1504 will be output by the MUX 1500 when the control signal is 1.

20 The values generated by the MUXes 1010, 1012, 1014 in the first through third sets of MUXES 1002, 1004, 1006 are output as the values in the first through third rows of values A1, A2, A3, in the set A of mapped
25 permutation matrix values.

An encryption circuit 806 suitable for use as the encryption circuit of Fig. 8 is illustrated in Fig. 13. As illustrated, the encryption circuit 806 includes
30 first through third signal encryption modules 1109, 1111,

1113 which are responsible for generating the R', G' and B' encrypted analog signals, respectively. Each of the first through third encryption modules includes first, second and third analog multipliers 1110, 1112, 1114, and an analog adder 1116. The gain of the first through third analog multipliers 1110, 1112, 1114 in each of the encryption modules is controlled by a corresponding mapped permutation matrix value. The values used to control the first through third adders of the first encryption module 1109 are the values $[A_{11}, A_{12}, A_{13}]$ which form the first row A1 of the mapped permutation matrix A. The values used to control the first through third adders of the second encryption module 1111 are the values $[A_{21}, A_{22}, A_{23}]$ which form the second row A2 of the mapped permutation matrix A. The values used to control the first through third adders of the third encryption module 1113 are the values $[A_{31}, A_{32}, A_{33}]$ which form the third row A3 of the mapped permutation matrix A.

The signals output by a decryption module's first through third analog multipliers 1110, 1112, 1114 are summed by the analog adder 1116. In this manner, the encrypted analog video signal R' is generated by the first encryption module 1109, the encrypted analog video signal G' is generated by the second encryption module 1111, and the encrypted analog video signal B' is generated by the third encryption module 1113.

A video signal decryption circuit 906 suitable for use in the display device 947 is illustrated in Fig. 14. As illustrated, the video signal decryption circuit

906 includes first, second and third decryption modules 1201, 1203, 1205 each of which is responsible for generating one of the decoded analog R, G, B video signals. Which particular decryption module 1201, 1203 or 1205 will generate the R, G, or B signal at any given time will depend on the mapped permutation matrix A.

Each of the first through third decryption modules 1201, 1203, 1205 processes a different pair of encrypted R', G', B' analog video signal to generate a decrypted analog video signal therefrom. The first decryption module 1201 processes the pair of encrypted signals (R', G'), the second decryption module 1201 processes the pair of encrypted signals (G', B'), while the third decryption module 1205 processes the pair of encrypted signals (B', R').

The decryption modules 1201, 1203, 1205 each include an analog adder and divider circuit 1202, first through third pass gates 1220, 1222, 1224 and an output control circuit 1210. The analog adder and divider circuit 1202 receives as its input the two encrypted video signals to be processed. If a variable α is supported, then the circuit 1202 also receives an α value to be used. In cases where α is fixed, e.g., at 1, the α input is not required. The circuit 1202 generates a decrypted analog video signal by summing the two encrypted input signals and dividing by 2α . The decoded video signal is supplied to the input of each of the three pass gates 1220, 1222, 1224.

The first pass gate 1220 of each decryption module is coupled to the R signal output line, the second pass gate 1222 of each decryption module is coupled to the G signal output line, while the third pass gate 1224 of each decryption module is coupled to the B signal output line. Each pass gate 1220, 1222, 1224 passes an input signal when a 1 is supplied to the control input of the pass gate, and blocks the input signal when a 0 is supplied to the control input of the pass gate. Thus, by controlling the pass gates 1220, 1222, 1224 the decrypted video signal generated by any one of the first, second or third decryption modules 1201, 1203, 1205 can be output on any one of the R, G, or B signal lines.

The control circuit 1210 of each decryption module determines to which R, G, or B output line the decrypted video signal produced by the module will be sent. The first, second and third decryption modules 1201, 1203, 1205 are controlled so that they each output the decrypted video signal they produce to the correct one of the R, G, B video signal lines.

The output line for a video signal, generated from a particular encrypted signal pair, is determined by comparing the corresponding rows of values in the mapped permutation matrix and finding the column location where the values agree. The control circuit 1210 does this by performing a bit wise ANDing operation after negating mapped permutation values included in the two rows from the set A1, A2, A3, which correspond to the set of

encoded signals being processed. Accordingly, the control circuit 1210 of the first decoder module 1201 performs a bit wise ANDing operation after negating permutation matrix values A1, A2. The control circuit 5 1210 of the second decoder module 1203 performs a bit wise ANDing operation on negated permutation matrix values A2, A3. Similarly, the control circuit 1210 of the third decoder module 1205 performs a bit wise ANDing operation on negated permutation matrix values A3, A1.

10 The ANDing operation performed by the control circuits 1210 produces a three bit control signal with a 1 located at the bit location where values in the two rows of the mapped permutation matrix being compared agree. The two other bits of the resulting 3 bit signal 15 will be zero. The first through third bits generated by the control circuit 1210 are used to control the first through third pass gates 1220, 1222, 1224 of the corresponding demodulator module. In this manner, the 20 decrypted video signal generated by the decryption modules is routed to the proper one of the R, G, B signal lines.

25 Various exemplary embodiments have been described above. In view of the description provided above, various modifications will be apparent to those skilled in the art without deviating from the inventive teachings described and claimed herein.

What is claimed is:

- 1 1. A method of processing first, second and third
2 signals for use in a system having first, second, and
3 third signal lines, comprising:
4 generating, using a pseudo-random number generator,
5 pseudo-random output values; and
6 changing, as a function of at least one of said
7 pseudo-random output values, which ones of the first,
8 second, and third signal lines are used to transmit the
9 first, second and third signals.
- 1 2. The method of claim 1, further comprising:
2 modifying at least one of the first, second or third
3 signals, as a function of said one pseudo-random output
4 value, prior to transmission of said one signal over one
5 of said first, second, and third signal lines.
- 1 3. The method of claim 2, wherein the changing and
2 modifying steps are performed by a matrix multiplication
3 operation performed on the first, second, and third
4 signals, the matrix multiplication operation utilizing
5 matrix coefficients generated from a plurality of the
6 pseudo-random output values.
- 1 4. The method of claim 3,
2 wherein the first, second, and third signal lines
3 couple a source device to a destination device, said
4 pseudo-random number generator contained within the
5 source device, the method further comprising:

6 operating the source device to communicate with the
7 destination device so as to establish a session key; and
8 operating the pseudo-random number generator to
9 generate said pseudo-random output values as a function
10 of the established session key.

1 5. The method of claim 4, wherein the first, second,
2 and third signals correspond to color signals
3 representing an image, the method further comprising:
4 utilizing a different session key for each line of
5 an image that is transmitted.

1 6. The method of claim 5, wherein session key
2 information is transmitted to the destination device
3 during a video blanking period.

1 7. The method of claim 4, wherein the destination
2 device includes an additional pseudo-random number
3 generator, the method further comprising:
4 operating the destination device to perform, as a
5 function of an output of the additional pseudo-random
6 number generator, the inverse of the changing and
7 modifying steps performed by the source device to restore
8 the first, second and third signals to their original
9 condition so as to yield restored first, second and third
10 signals.

1 8. The method of claim 7, wherein the first, second and
2 third signals are analog red, green and blue color video
3 signals, respectively, the source device is a computer

4 system display adapter, and the destination device is a
5 computer monitor; the method further comprising:

6 displaying, on a display screen included in the
7 destination device, an image represented by restored
8 first, second and third color video signals.

1 9. The method of claim 1, wherein the first, second and
2 third signal lines couple a source device to a
3 destination device, said pseudo-random number generator
4 being included in the source device, the method further
5 comprising:

6 operating the source device to communicate with the
7 destination device to establish a session key; and

8 operating the pseudo-random number generator to
9 generate said pseudo-random output values as a function
10 of the established session key.

1 10. The method of claim 9, wherein the method further
2 comprises, prior to establishing a session key:

3 operating the source device to request
4 identification information from the destination device;
5 and

6 if the identification information is received from
7 the display device, determining from the identification
8 information, if the destination device is an encryption
9 capable device.

1 11. The method of claim 10, further comprising:

2
3 if no identification information is received in
4 a preselected period of time after requesting

5 identification information, restricting the output of the
6 source device over the first, second and third lines to
7 unencrypted video signals which are not subject to
8 restrictions prohibiting their transmission in
9 unencrypted form over analog transmission lines, the
10 unencrypted video signals being fourth, fifth and sixth
11 video signals.

1 12. The method of claim 10, wherein the identification
2 information received from the destination device includes
3 a digital certificate confirming identify of the
4 destination device if the destination device is an
5 encryption capable device; and wherein determining if the
6 destination device is an encryption capable device
7 includes the act of checking the received identification
8 information to determine if said received identification
9 information includes said digital certificate.

1 13. The method of claim 11, wherein the source device is
2 a display adapter, the method further comprising:
3 storing session keys used to encrypt video data on
4 the display adapter; and
5 limiting export of video data subject to copy
6 constraints to video data that is in encrypted form.

1 14. The method of claim 13, further comprising:
2 interfacing with electronics devices though a 1394
3 interface.

1 15. A method of generating encrypted analog first,
2 second and third signals (R', G', B', respectively) from

first, second, and third analog input signals (R, G, B, respectively) the method comprising:

pseudo-randomly generating at least one of a plurality of matrix coefficients, a_1 , a_2 , a_3 , b_1 , b_2 , b_3 , c_1 , c_2 , c_3 ;

using an encryption circuit to perform a matrix multiplication operation to generate the encrypted analog first, second, and third signals, according to the following equations:

$$R' = a_1R + b_1G + c_1B$$

$$G' = a_2R + b_2G + c_2B$$

$$B' = a_3R + b_3G + c_3B.$$

16. The method of claim 15, wherein the matrix coefficients are generated such that the set of matrix coefficients a_1 , b_1 , c_1 include two values which are the same and one value that is different.

17. The method of claim 16, wherein the matrix coefficients are further generated such that:

the set of matrix coefficients a_2 , b_2 , c_2 include two values which are the same and one value that is different; and

the set of matrix coefficients a_3 , b_3 , c_3 include two values which are the same and one value that is different.

18. The method of claim 17, wherein the matrix coefficients are further generated such that:

3 the set of matrix coefficients a_1, a_2, a_3
4 include two values which are the same and one value that
5 is different;

6 the set of matrix coefficients b_1, b_2, b_3
7 include two values which are the same and one value that
8 is different; and.

9 the set of matrix coefficients c_1, c_2, c_3
10 include two values which are the same and one value that
11 is different.

1 19. The method of claim 16, wherein the two values which
2 are the same are positive values and the value which is
3 different is a negative value.

1 20. The method of claim 15, wherein the matrix
2 coefficients are generated such that each of the R', G'
3 and B' signals will be the product of summing two signals
4 in the set of analog signals R, G, B and subtracting one
5 of the signals in the set of analog signals R, G, B .

1 21. The method of claim 15, wherein the matrix
2 multiplication operation includes the acts of:
3 performing analog multiplication operations to
4 multiply the R, G , and B signals by the coefficients $a_1,$
5 b_1, c_1 , respectively.

1 22. The method of claim 15, wherein the first, second
2 and third signals correspond to red, green and blue video
3 signals, respectively.

1 23. The method of claim 22 performed by a source device
2 and further comprising:
3 communicating with a destination device to establish
4 a content encryption key to be used as an input to the
5 pseudo-random number generator.

1 24. The method of claim 23, further comprising:
2 using a different content encryption key when
3 encrypting portions of the first, second and third video
4 signals which correspond to different lines of an image.

1 25. A communication method comprising the steps of:
2 using a pseudo-random number generator to
3 generate output values; and
4 modifying first, second and third signals, by
5 performing a matrix multiplication operation thereon
6 utilizing matrix coefficients which are a function of at
7 least one of the pseudo-random output values, the
8 modified first, second and third signals being encrypted
9 analog signals so as to define first, second and third
10 encrypted analog signals; and
11 transmitting the first, second and third
12 encrypted analog signals to a destination device.

1 26. The method of claim 19, wherein the matrix
2 coefficients correspond to a 3x3 array of matrix
3 coefficients, each row of coefficients including two
4 coefficients of the same value and one coefficient of a
5 different value.

1 28. The method of claim 25, wherein the matrix
2 multiplication operation includes the act of:
3 performing a plurality of analog signal
4 multiplication operations.

30. The method of claim 25, wherein said matrix multiplication involves summing an integer multiple of two of the first, second and third signals and subtracting an integer multiple of another one of said first second and third signals to produce the first encrypted analog signal.

1 32. The method of claim 31, further comprising:

operating the destination device to decrypt the first, second and third encrypted analog signals utilizing the encryption key.

33. The method of claim 32, wherein operating the destination device to decrypt the first, second and third encrypted analog signals comprises the act of performing a matrix multiplication operation on the first, second and third encrypted analog signals utilizing matrix coefficients generated from said at least one pseudo-random output value.

34. The method of claim 33, wherein the source device is a display adapter, the destination device is a display device, and the first, second and third signals are red, green and blue video signals, respectively.

35. A computer readable medium comprising:
computer executable instructions for controlling a computer device to perform the steps of:
operating a pseudo-random number generator to generate a pseudo-random output value; and
modifying first, second and third signals, by performing a matrix multiplication operation thereon utilizing matrix coefficients at least one of which is a function of the pseudo-random number output value so as to define first, second and third encrypted analog signals; and
transmitting the first, second and third encrypted analog signals to a destination device.

1 36. A device, comprising:

2 a video signal encryption circuit for encrypting, in
3 response to a pseudo-random number, red, green and blue
4 video signals and for producing first, second and third
5 analog encrypted video signals;

6 a pseudo-random number generator circuit, coupled to
7 the video signal encryption circuit, for producing the
8 pseudo-random number value; and

9 an input/output interface for outputting the first,
10 second and third encrypted analog video signals.

1 37. The device of claim 36, further comprising means for
2 communicating with a destination device for establishing
3 a session key to be used for encrypting and decrypting
4 the red, green and blue analog encrypted video signals.

1 38. The device of claim 36, further comprising,
2 video processor circuitry for processing received
3 video signals;

4 an additional input/output interface for coupling
5 the video processor to a system bus and a IEEE 1394
6 compliant bus; and

7 a content cipher subsystem for encrypting and
8 decrypting information communicated over the IEEE 1394
9 compliant bus.

1 38. The device of claim 36, further comprising:

2 a physically secure non-volatile memory device for
3 storing encryption keys; and

4 means for limiting export from the device of video
5 data, subject to copy restrictions, received in encrypted

6
7

- 1
- 2
- 3
- 4

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

1

2 generating a third decrypted analog signal
3 from a third pair of encrypted analog signals by:
4 summing the two encrypted analog
5 signals in the third pair of analog signals to
6 produce a third sum; and
7 dividing the third sum by a third
8 value to produce a third decrypted analog
9 signal.

1 44. The method of claim 43, wherein the first, second
2 and third values are the same.

1 45. The method of claim 44, wherein the first, second
2 and third values are integer multiples of 2.

1 46. The method of claim 44, further comprising the step
2 of:

3 periodically changing the value used for the
4 first, second and third values as a function of the
5 output of a pseudo random number generator.

1 47. The method of claim 41, further comprising:
2 comparing values in first and second rows of
3 values to identify a first column of values in which the
4 first and second rows of values include the same value;
5 and
6 controlling which one of a plurality of output
7 lines the first decrypted analog signal is transmitted on
8 as a function of the identified column of values.

1 48. The method of claim 43, further comprising:

2 comparing values in first and second rows of
3 values to identify a first column in which the first and
4 second rows of values include the same value;

5 comparing values in second and third rows of
6 values to identify a second column in which the second
7 and third rows of values include the same value, the
8 second column being different than said first column;

9 and

10 controlling which one of a plurality of output
11 lines the first decrypted analog signal is transmitted on
12 as a function of the identified first column and which
13 one of the plurality of output lines the second decrypted
14 analog signal is transmitted on as a function of the
15 identified second column, the first and second decrypted
16 analog signals being transmitted on different output
17 lines.

1 49. The method of claim 48, wherein the first and second
2 rows of values are first and second rows of values
3 included in a permutation matrix used to encrypt the
4 analog signals included in the first pair of signals.

1 50. The method of claim 48, further comprising:

2 comparing values in a third row of values and
3 said first row of values to identify a third column in
4 which the third and first rows of values include the same
5 value;

6 and

7 controlling which one of a plurality of output
8 lines the third decrypted analog signal is transmitted on
9 as a function of the identified third column, the third

1 51. The method of claim 49, wherein the first and second
2 rows of values are first and second rows of values
3 included in a permutation matrix used to encrypt the
4 analog signals included in the first pair of signals;
5 wherein the second and third rows of values
6 are second and third rows of values included in said
7 permutation matrix; and
8 wherein the third and first rows of values are
9 third and first rows of values included in said
10 permutation matrix.

1 53. A method of generating an encrypted analog signal
2 from at least two of a first analog input signal, a
3 second analog input signal, and a third analog input
4 signal, the method comprising:
5 pseudo-randomly generating an encryption value;
6 multiplying a first one of said first, second, and
7 third analog input signals with said encryption value to
8 produce a multiplied signal; and

1 54. The method of claim 53, wherein said multiplying and
2 said combining are performed as part of a matrix
3 multiplication operation.

1

ABSTRACT OF THE DISCLOSURE

Methods and apparatus for protecting copyrighted information, e.g., video signals, from unauthorized copying. Analog red (R), green (G) and blue (B) video signals are transmitted from a source device, e.g., a display adapter, to a display device, e.g., a monitor, over corresponding analog signal lines after the identify of the destination device is confirmed by receipt of a certificate assigned to the destination device. A session key, used for encrypting the analog signals, is generated and exchanged between the source and destination devices after the identification of the destination device is confirmed. The source and destination devices each includes a pseudo-random number generator driven by the session key. The lines that carry the R, G and B video signals are changed, e.g., swapped, on a periodic basis as a function of the output of the pseudo-random number generator in the source device. The destination device, which has an input to its pseudo-random number generator synchronized with the random number generator of the source device, decrypts the received video signals in a complimentary fashion to the encryption. Encrypted digital information subject to copying constraints may be supplied to a display adapter via an IEEE 1394 compliant bus.

20050501 15:00:00

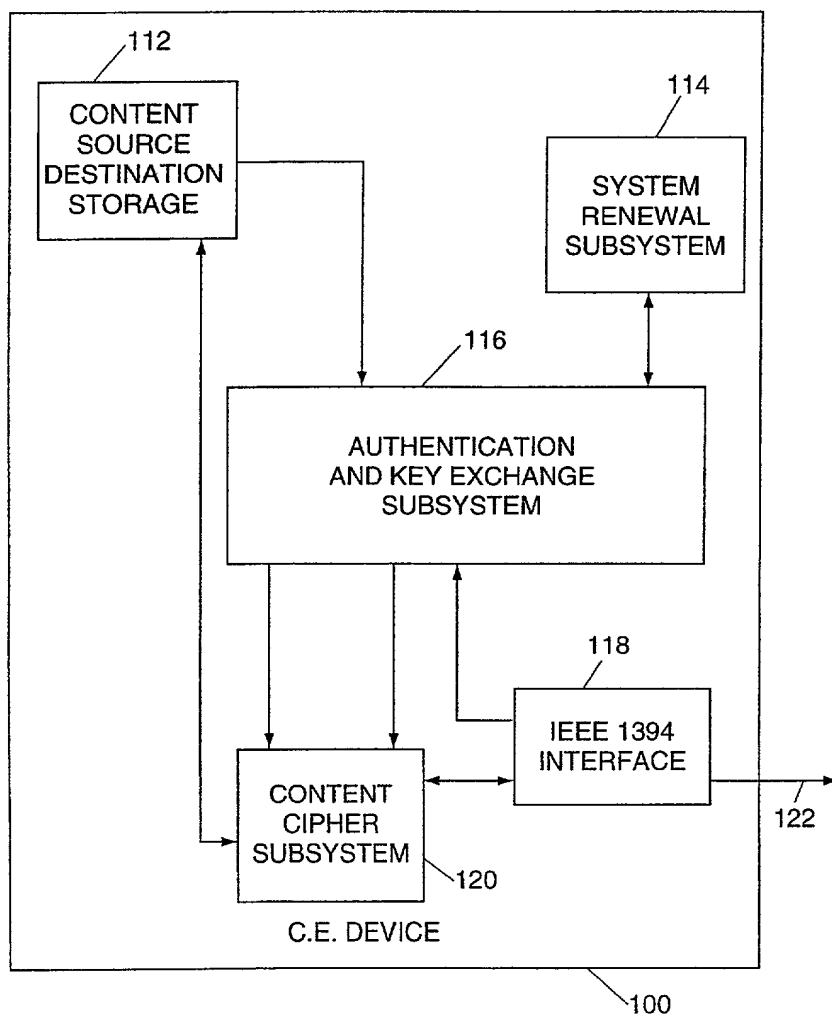
[illegible]

FIG. 1

PRIOR ART

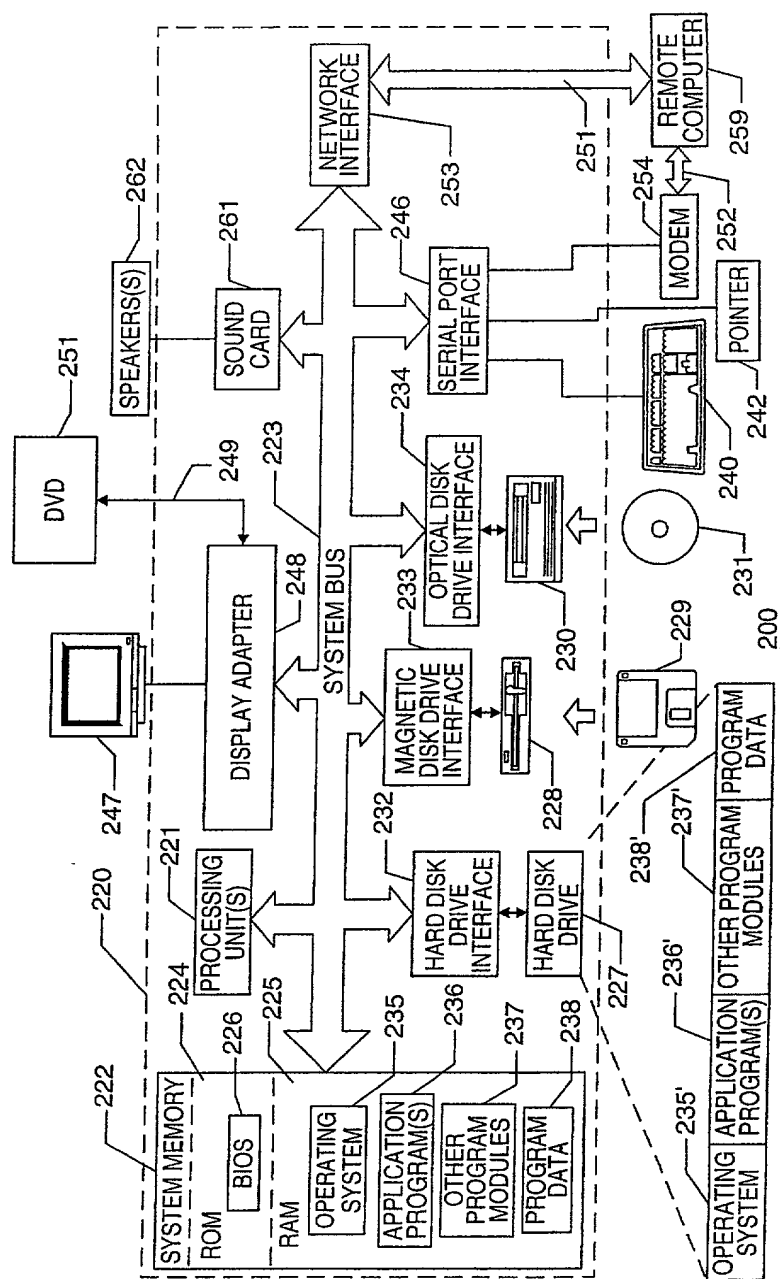


FIG. 2


```

graph TD
    350((350)) --> 352([START - INITIATE DISPLAY ADAPTER OPERATION AND REQUEST IDENTIFICATION INFORMATION FROM ANY DISPLAY DEVICE COUPLED TO THE DISPLAY ADAPTER])
    352 --> 354[MONITOR FOR RESPONSE FROM DISPLAY DEVICE]
    354 --> 356{HAS A RESPONSE BEEN DETECTED WITHIN PRESELECTED TIME PERIOD?}
    356 -- Y --> 358[EXAMINE IDENTIFICATION INFORMATION]
    356 -- N --> 362[RESTRICT VIDEO ADAPTER OUTPUT TO VIDEO INFORMATION NOT SUBJECT TO ENCRYPTION RESTRICTION]
    358 --> 360{IS THE DISPLAY A LINE SWAPPING CAPABLE DISPLAY?}
    360 -- Y --> 366[EXCHANGE SESSION KEY AND SYNCHRONIZATION INFORMATION WITH DISPLAY DEVICE ON PERIODIC BASIS]
    360 -- N --> 364[OUTPUT R, G, B VIDEO SIGNALS IN FIRST, SECOND AND THIRD LINES RESPECTIVELY]
    366 --> 368[OUTPUT VIDEO SIGNALS ON FIRST, SECOND AND THIRD LINES AS A FUNCTION OF PSEUDO RANDOM NUMBER GENERATOR OUTPUT]
    364 --> 368
    368 --> 370([STOP])

```

FIG. 4

FIG. 4

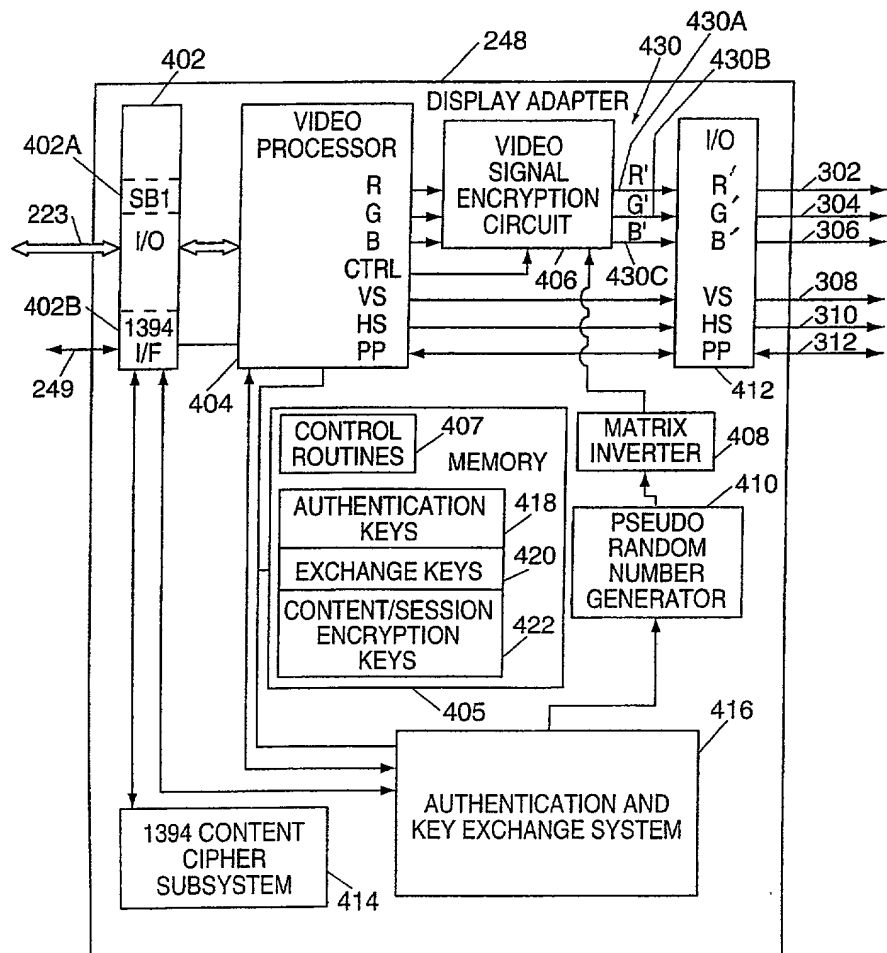


FIG. 5

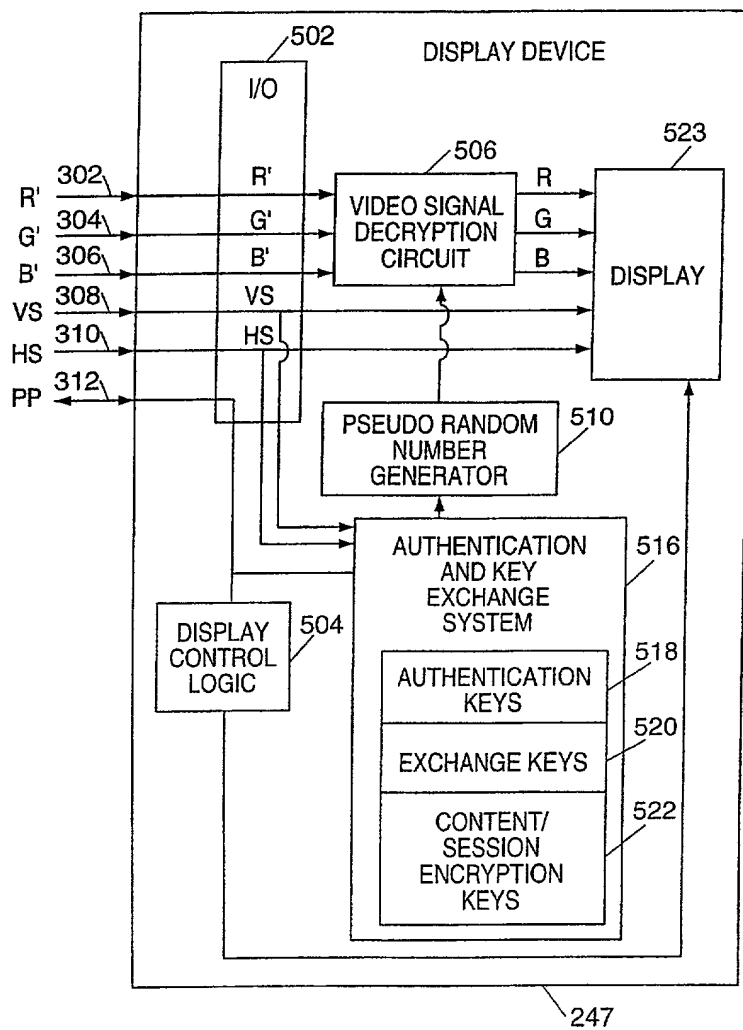
[illegible]

FIG. 6

$$\begin{bmatrix} R' \\ G' \\ B' \end{bmatrix} = \begin{bmatrix} -1 & 0 & 0 \\ 0 & 1 & 0 \\ 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} R \\ G \\ B \end{bmatrix} \quad 602$$

FIG. 7

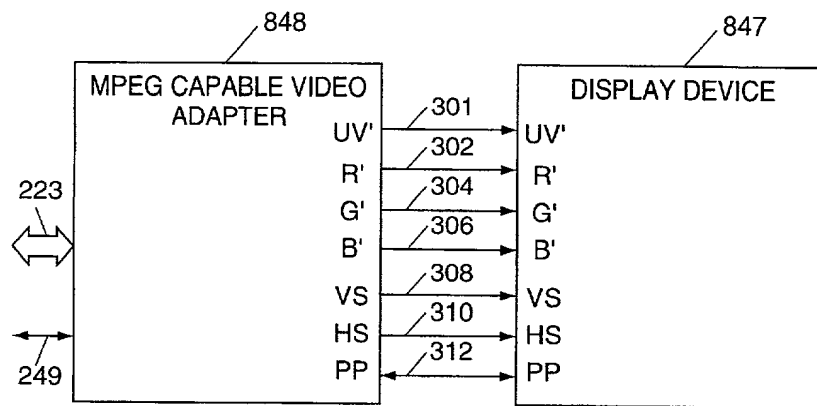


FIG. 8

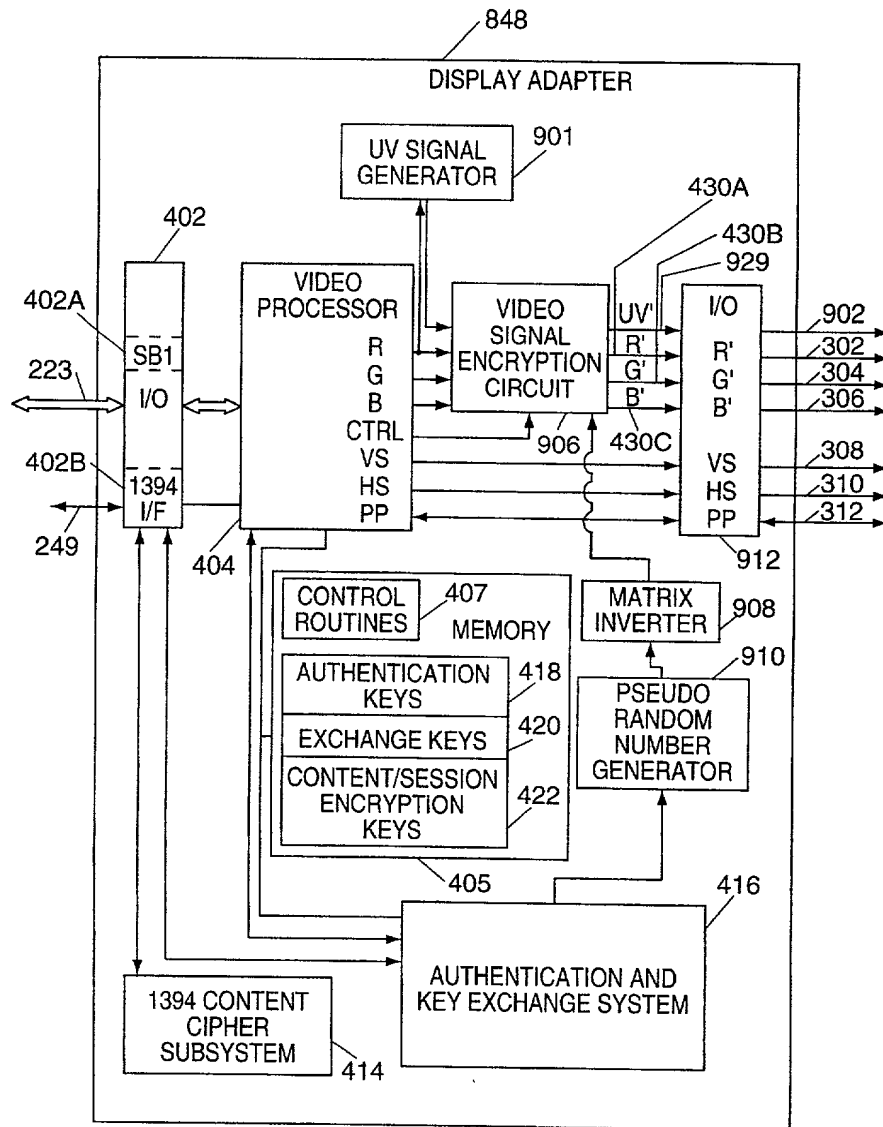


FIG. 9

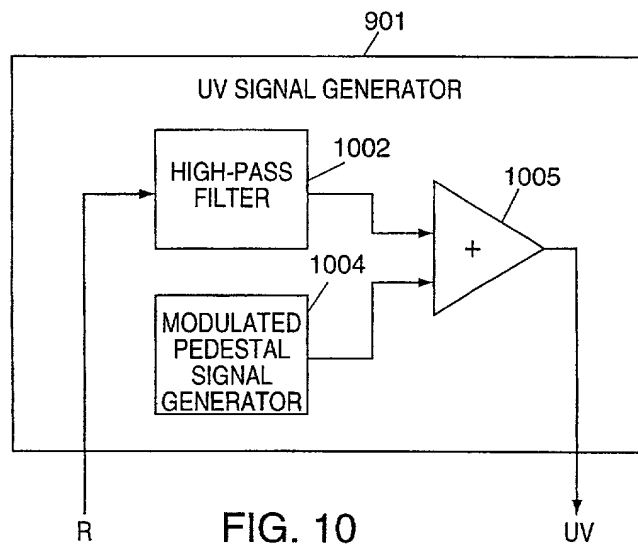


FIG. 10

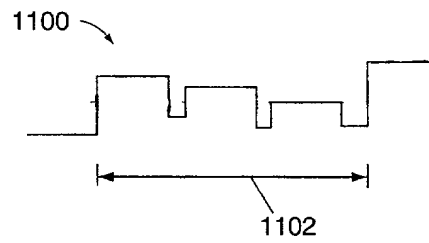


FIG. 11



FIG. 12

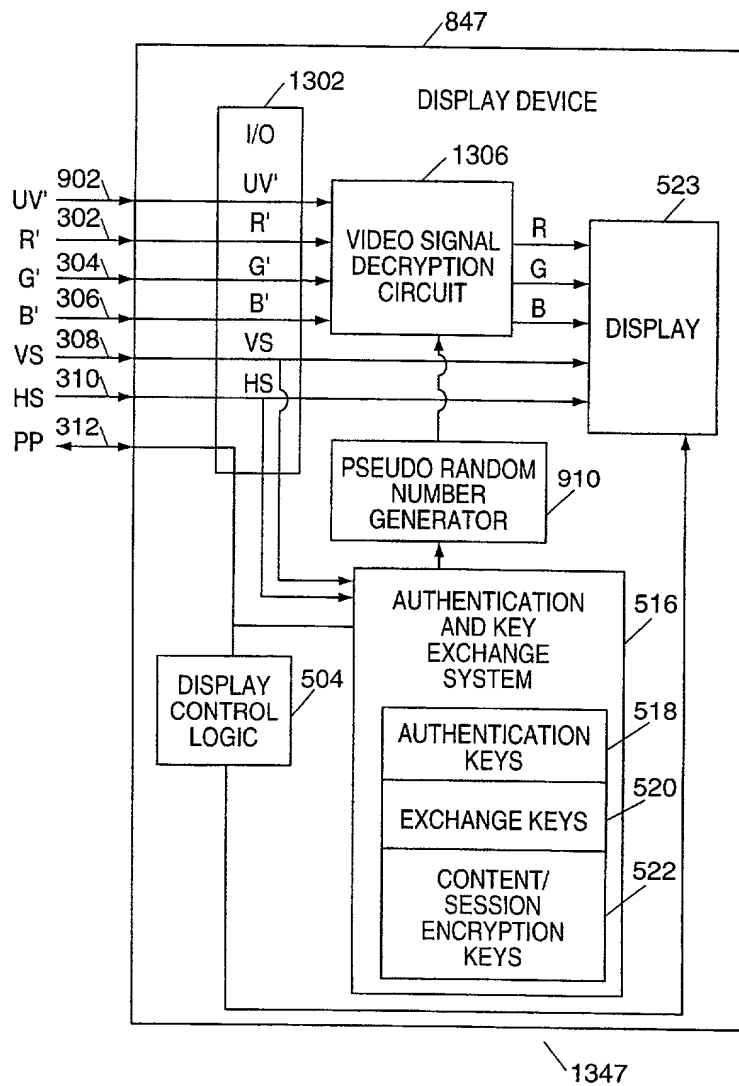
[illegible]

FIG. 13

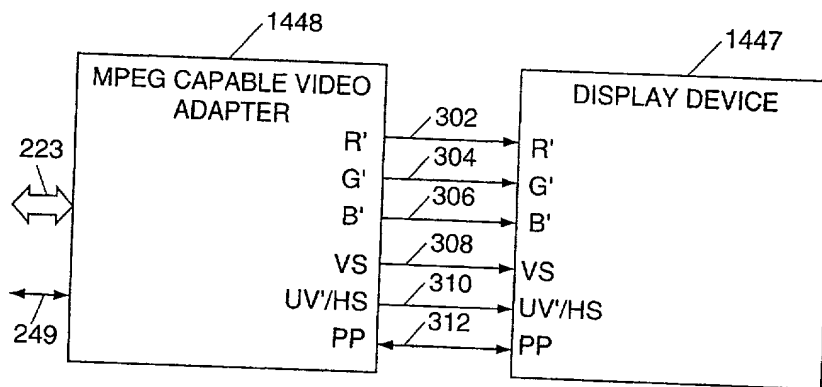


FIG. 14

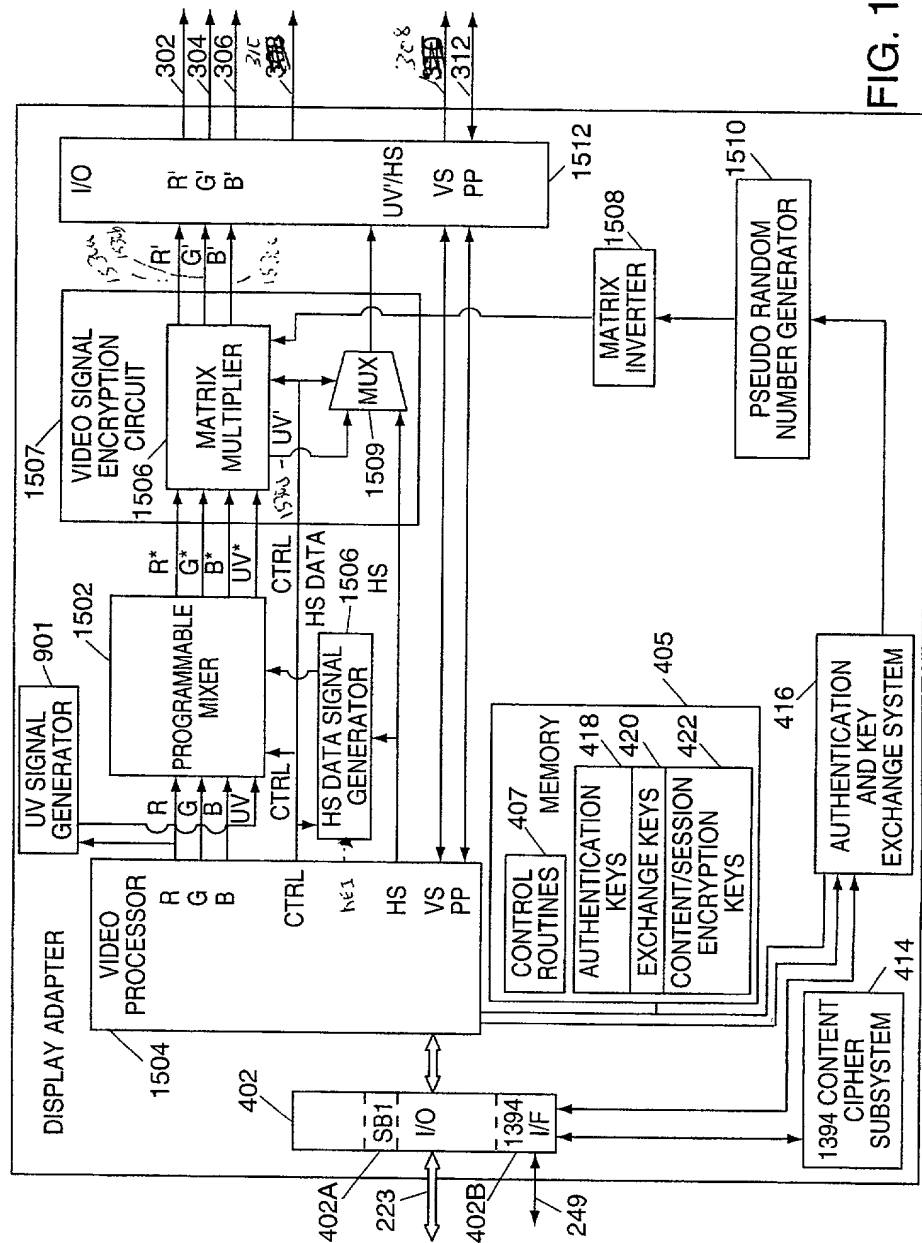


FIG. 15

1950	1951	1952	1953	1954	1955	1956	1957	1958	1959	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358</
------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	--------

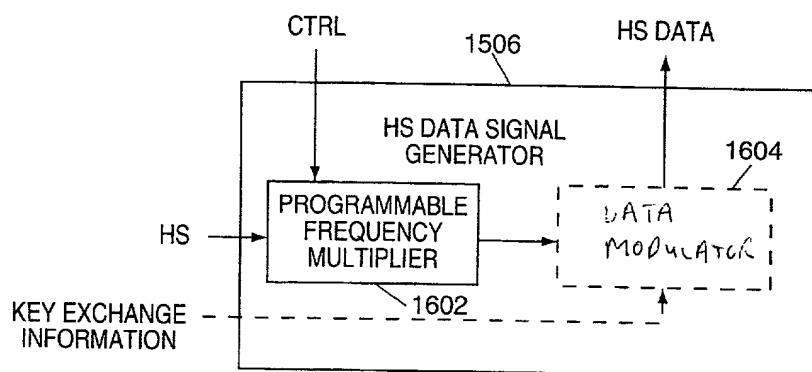


FIG. 16

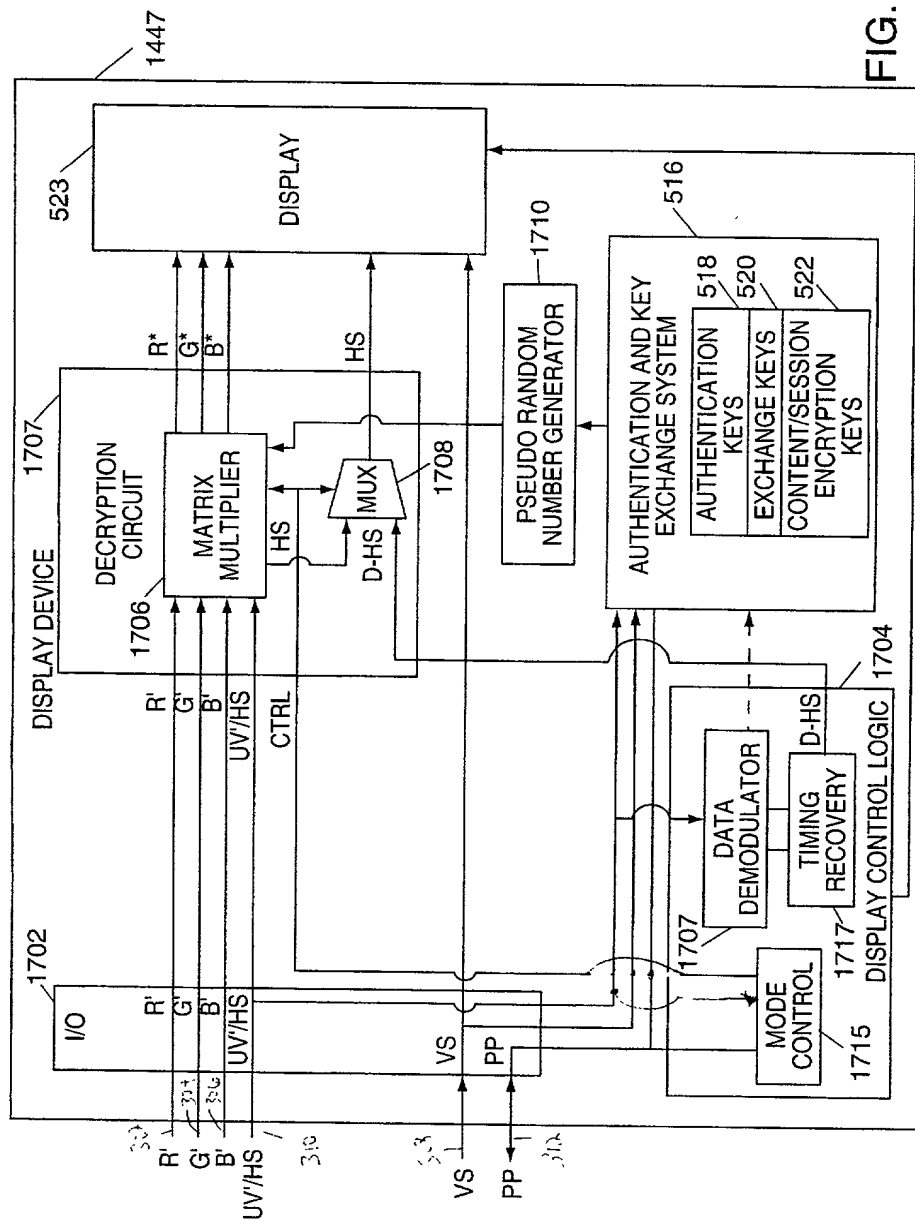


FIG. 17

**DECLARATION AND
POWER OF ATTORNEY**
(Utility Patent Application)

As a below named inventor, I hereby declare:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHODS AND APPARATUS FOR PROTECTING INFORMATION CONTENT

the specification of which:

- ☒ is attached hereto
- ☐ was filed on _____ as Application Serial No. _____ with amendment(s) filed _____
- ☐ was filed as PCT international application: serial number _____ on _____ and was amended under PCT Article 19 on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations section 1.56.

I hereby claim foreign priority benefits under Section 119 of Title 35, United States Code for the above-identified US patent application based on the patent or inventor's certificate identified below and having a filing date before that of the US patent application for which priority is claimed:

<u>Application No.</u>	<u>Country</u>	<u>Filing Date</u>	<u>Priority Claimed</u> <u>under 35 U.S.C. §119</u>
------------------------	----------------	--------------------	--

I hereby claim the benefit under Section 120 and/or Section 119(e) of Title 35 of the United States Code of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by Section 112 of Title 35 of the United States Code, I acknowledge the duty to disclose material information, as defined in Section 1.56 of Title 37 of the Code of Federal Regulations, which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application</u>	<u>Serial No.</u>	<u>Filing Date</u>	<u>Patented</u>	<u>Pending</u>	<u>Abandoned</u>
Prov. App. S.N. 60/160,603		Oct. 20, 1999		X	

Power of attorney:

As a named inventor, I hereby appoint:

Michael P. Straub (Reg. No. 36,941)
 John C. Pokotylo (Reg. No. 36,242)
 Daniel D. Crouse (Reg. No. 32,022)
 Katie E. Sako (Reg. No. 32,628)

as my attorneys to prosecute this application and to transact all business in the United States Patent and Trademark Office in connection therewith.

Direct all correspondence to Customer Number IDON601137 at the following address:

STRAUB & POKOTYLO
 1 Bethany Road
 Suite 56, Building 4
 Hazlet, New Jersey 07730.

Direct all telephone calls to: (732) 335-1222.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

First inventor:

Full name: Yacobi Yacov
last first middle
Residence address: 5050 W. Mercer Way
street
Mercer Island, WA 98040 USA
city, state, zip code country
Post Office address: same as residence
post office & box number
city, state, zip code country
Citizenship: USA and Israel
country
Signature: Yacov Yacobi
Date: 6/29/00

Second inventor:

Full name: England Paul
last first middle
Residence address: 16659 Northup Way
street
Bellevue, WA 98008 USA
city, state, zip code country
Post Office address: same as residence
post office & box number
city, state, zip code country
Citizenship: United Kingdom
country
Signature:
Date: 6/29/00

Third inventor:

Full name: Yuval Gideon A.
last first middle
Residence address: 7660 81st Pl SE
street
Mercer Island, WA 98040 USA
city, state, zip code country
Post Office address: same as residence
post office & box number

city, state, zip code country
Citizenship: USA and Israel
country

Signature: _____

Date: _____